


Smart lock User Manual

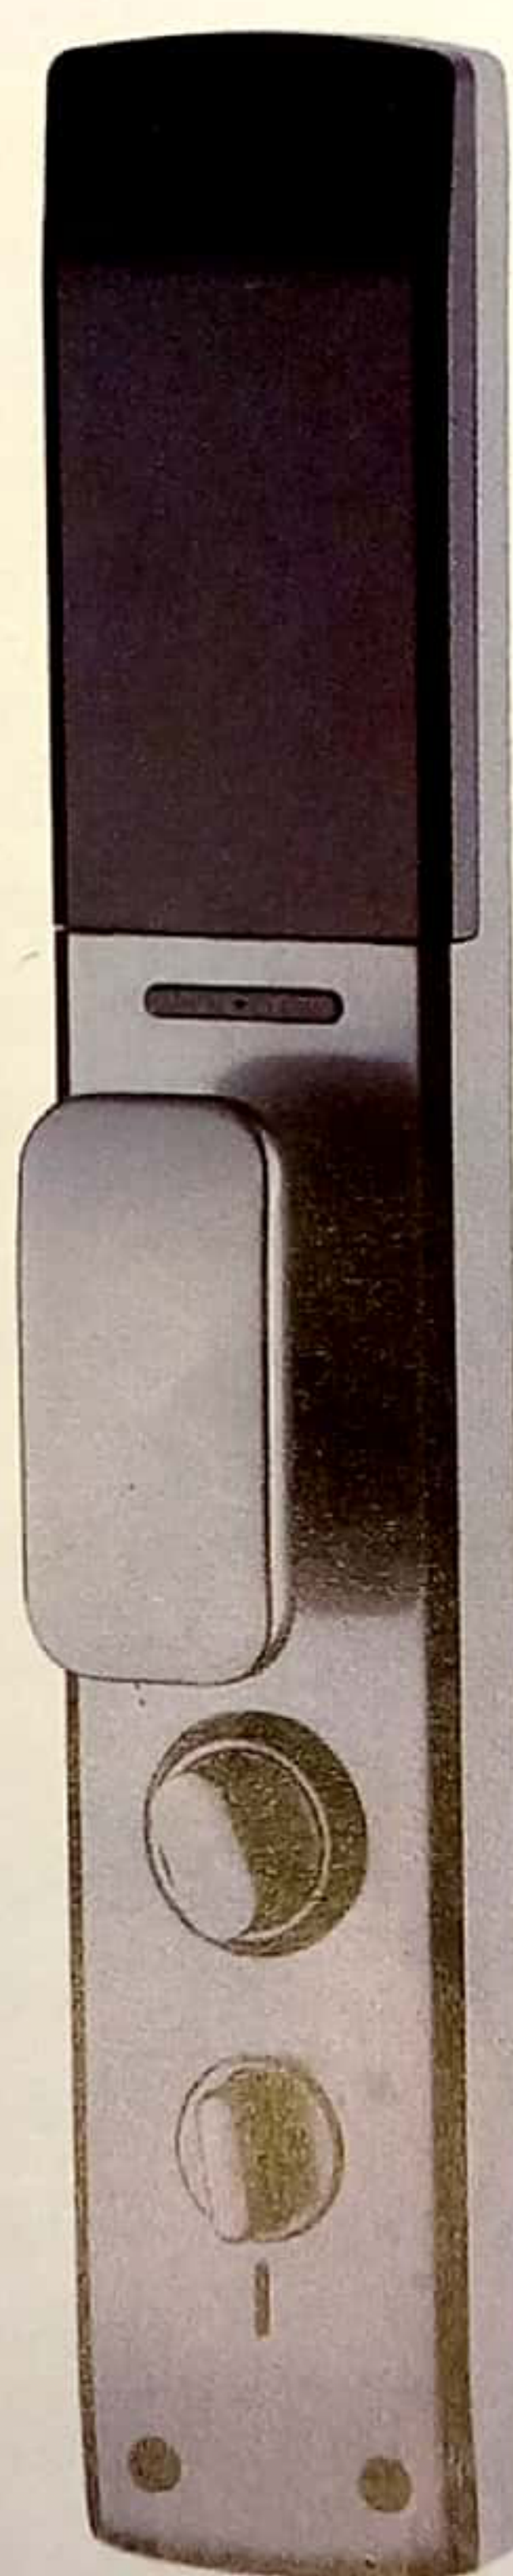

DF01 HD

US MARTGO

DF01

TUYA

Instruction manual for door lock

Model: DF01

I. Product layout:

■ Open way: fingerprint, password, IC card, key, WeChat small program and other ways to open the door,

Bring you different experience to open the door;

■ Fingerprint: Using advanced semiconductor sensor, 360-degree recognition Angle, wide range of fingerprint collection,

High resolution, effectively prevent false fingerprint;

■ Password: Adopt stylish and advanced touch-screen key technology, which can add 12 digits before and after the correct password

Password, effectively prevent many peers when the password embarrassment;

■ Dual verification mode: fingerprint, password and card can be set in pairs to verify unlocking, only after setting

There are two users at the same time verification can open the door, suitable for special occasions;

■ User management: administrator enjoys the highest authority (ordinary users can only open and close the door operation), can

edit setting the lock, the number of administrators is 9 (can be fingerprint, password, card), the total capacity is 300pcs;

■ Alarm function: The machine has anti-warping alarm, low pressure alarm, trial and error alarm;

■ Standby power supply: when the battery runs out, use 5V mobile power supply to emergency power supply for the door lock;

Notes:

1. When fingerprint collection, finger strength is moderate, do not vigorously pressure, to prevent the fingerprint collection head scratch;

2. Battery use time should not be too long, it is generally recommended to charge at least 3 months, otherwise battery leakage will damage the smart lock;

3. The lock use 8.4V high performance lithium battery, when the first prompt "low power, please replace the battery", according to different battery capacity, can also open the door about 100 times, at this time should be charged in time

4. Fingerprint/card/password input error 5 times in total after the alarm, the device sounds alarm, the door lock can not be used within 90 seconds;

■ Initialization operation: use the card needle, press the hole in the middle of the rear panel lock/lock button, hold for 5 seconds, the voice prompt "initialization successful", the factory engineering password is "123456", then you can open the door, after entering the administrator information, the engineering password

"123456" will be automatically deleted

Access door lock function

*—Return key, exit key, delete key

Press *# to Wake up screen in initialization state

Add administrator (can be fingerprint, password, card)

After adding successfully, then can enter into the door lock function

After adding successfully, then can enter into the door lock function

Add User and Delete User

After adding successfully, then can enter into the door lock function

After adding an administrator, you need to verify the administrator information every time when you need to enter function management

After adding an administrator, you need to verify the administrator information every time when you need to enter function management


After operating successfully, press * to return to the previous level or continue to add user

Press 2 to delete user


Enter the user's fingerprint, password, card that you need to delete

After operating successfully, press * to return to the previous level or continue to delete user


Door Lock Setting

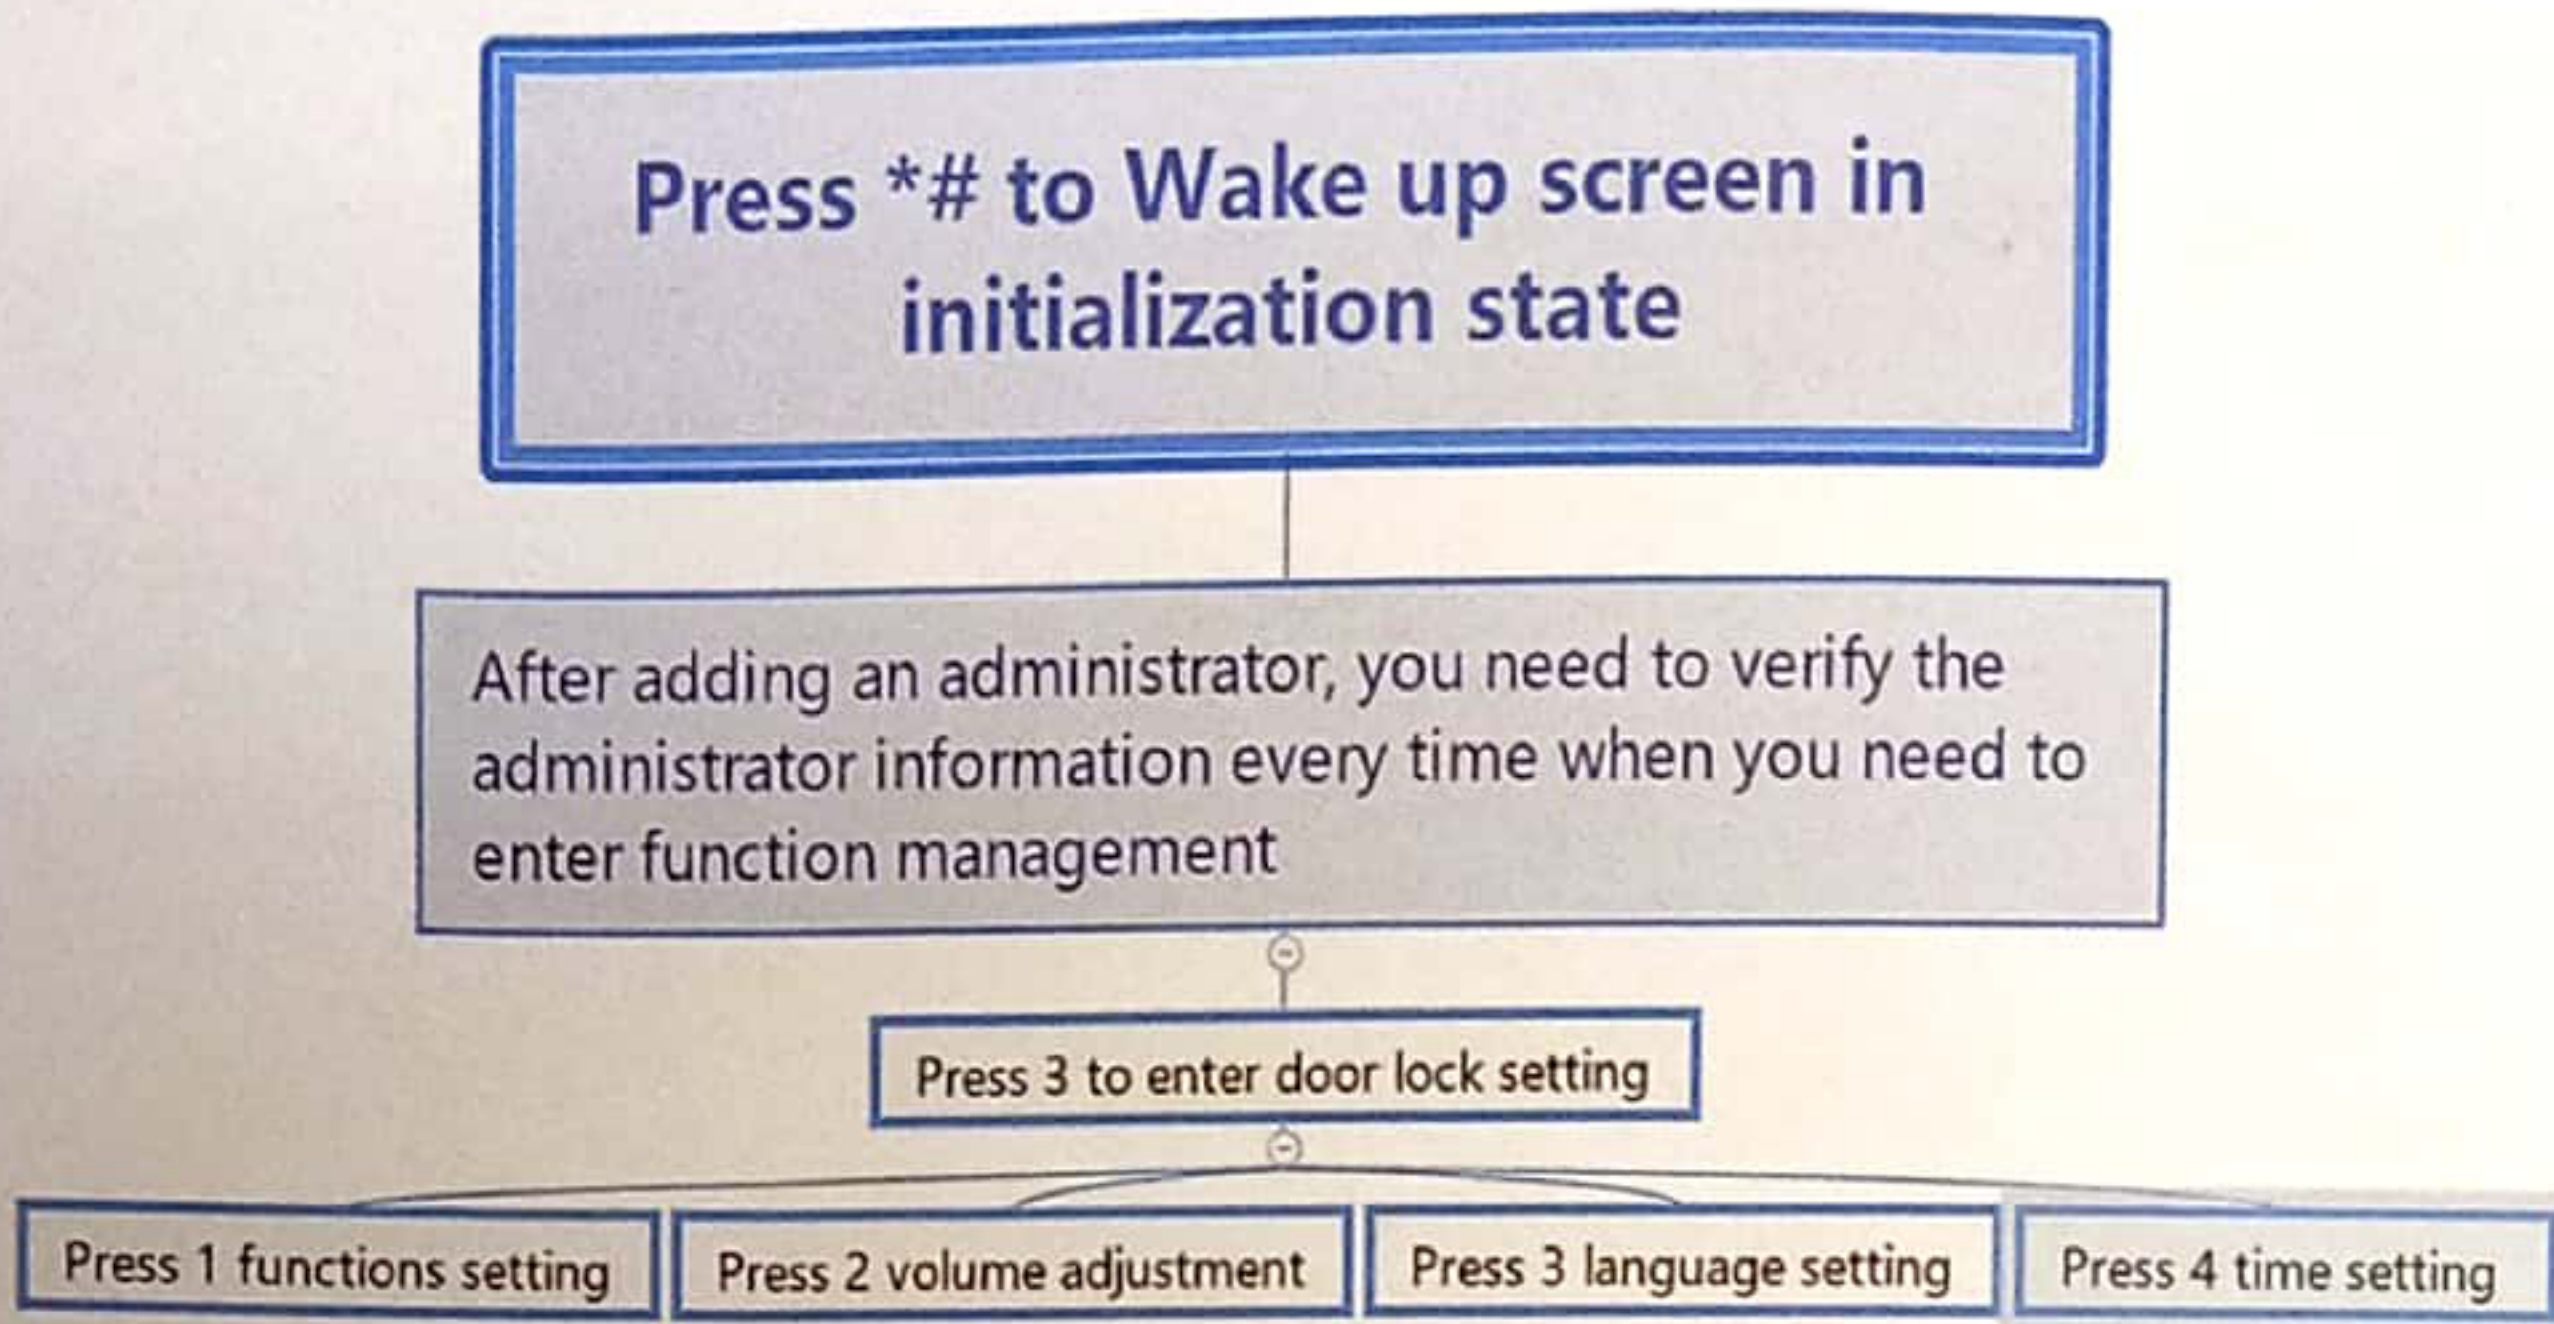

Adding Administrator

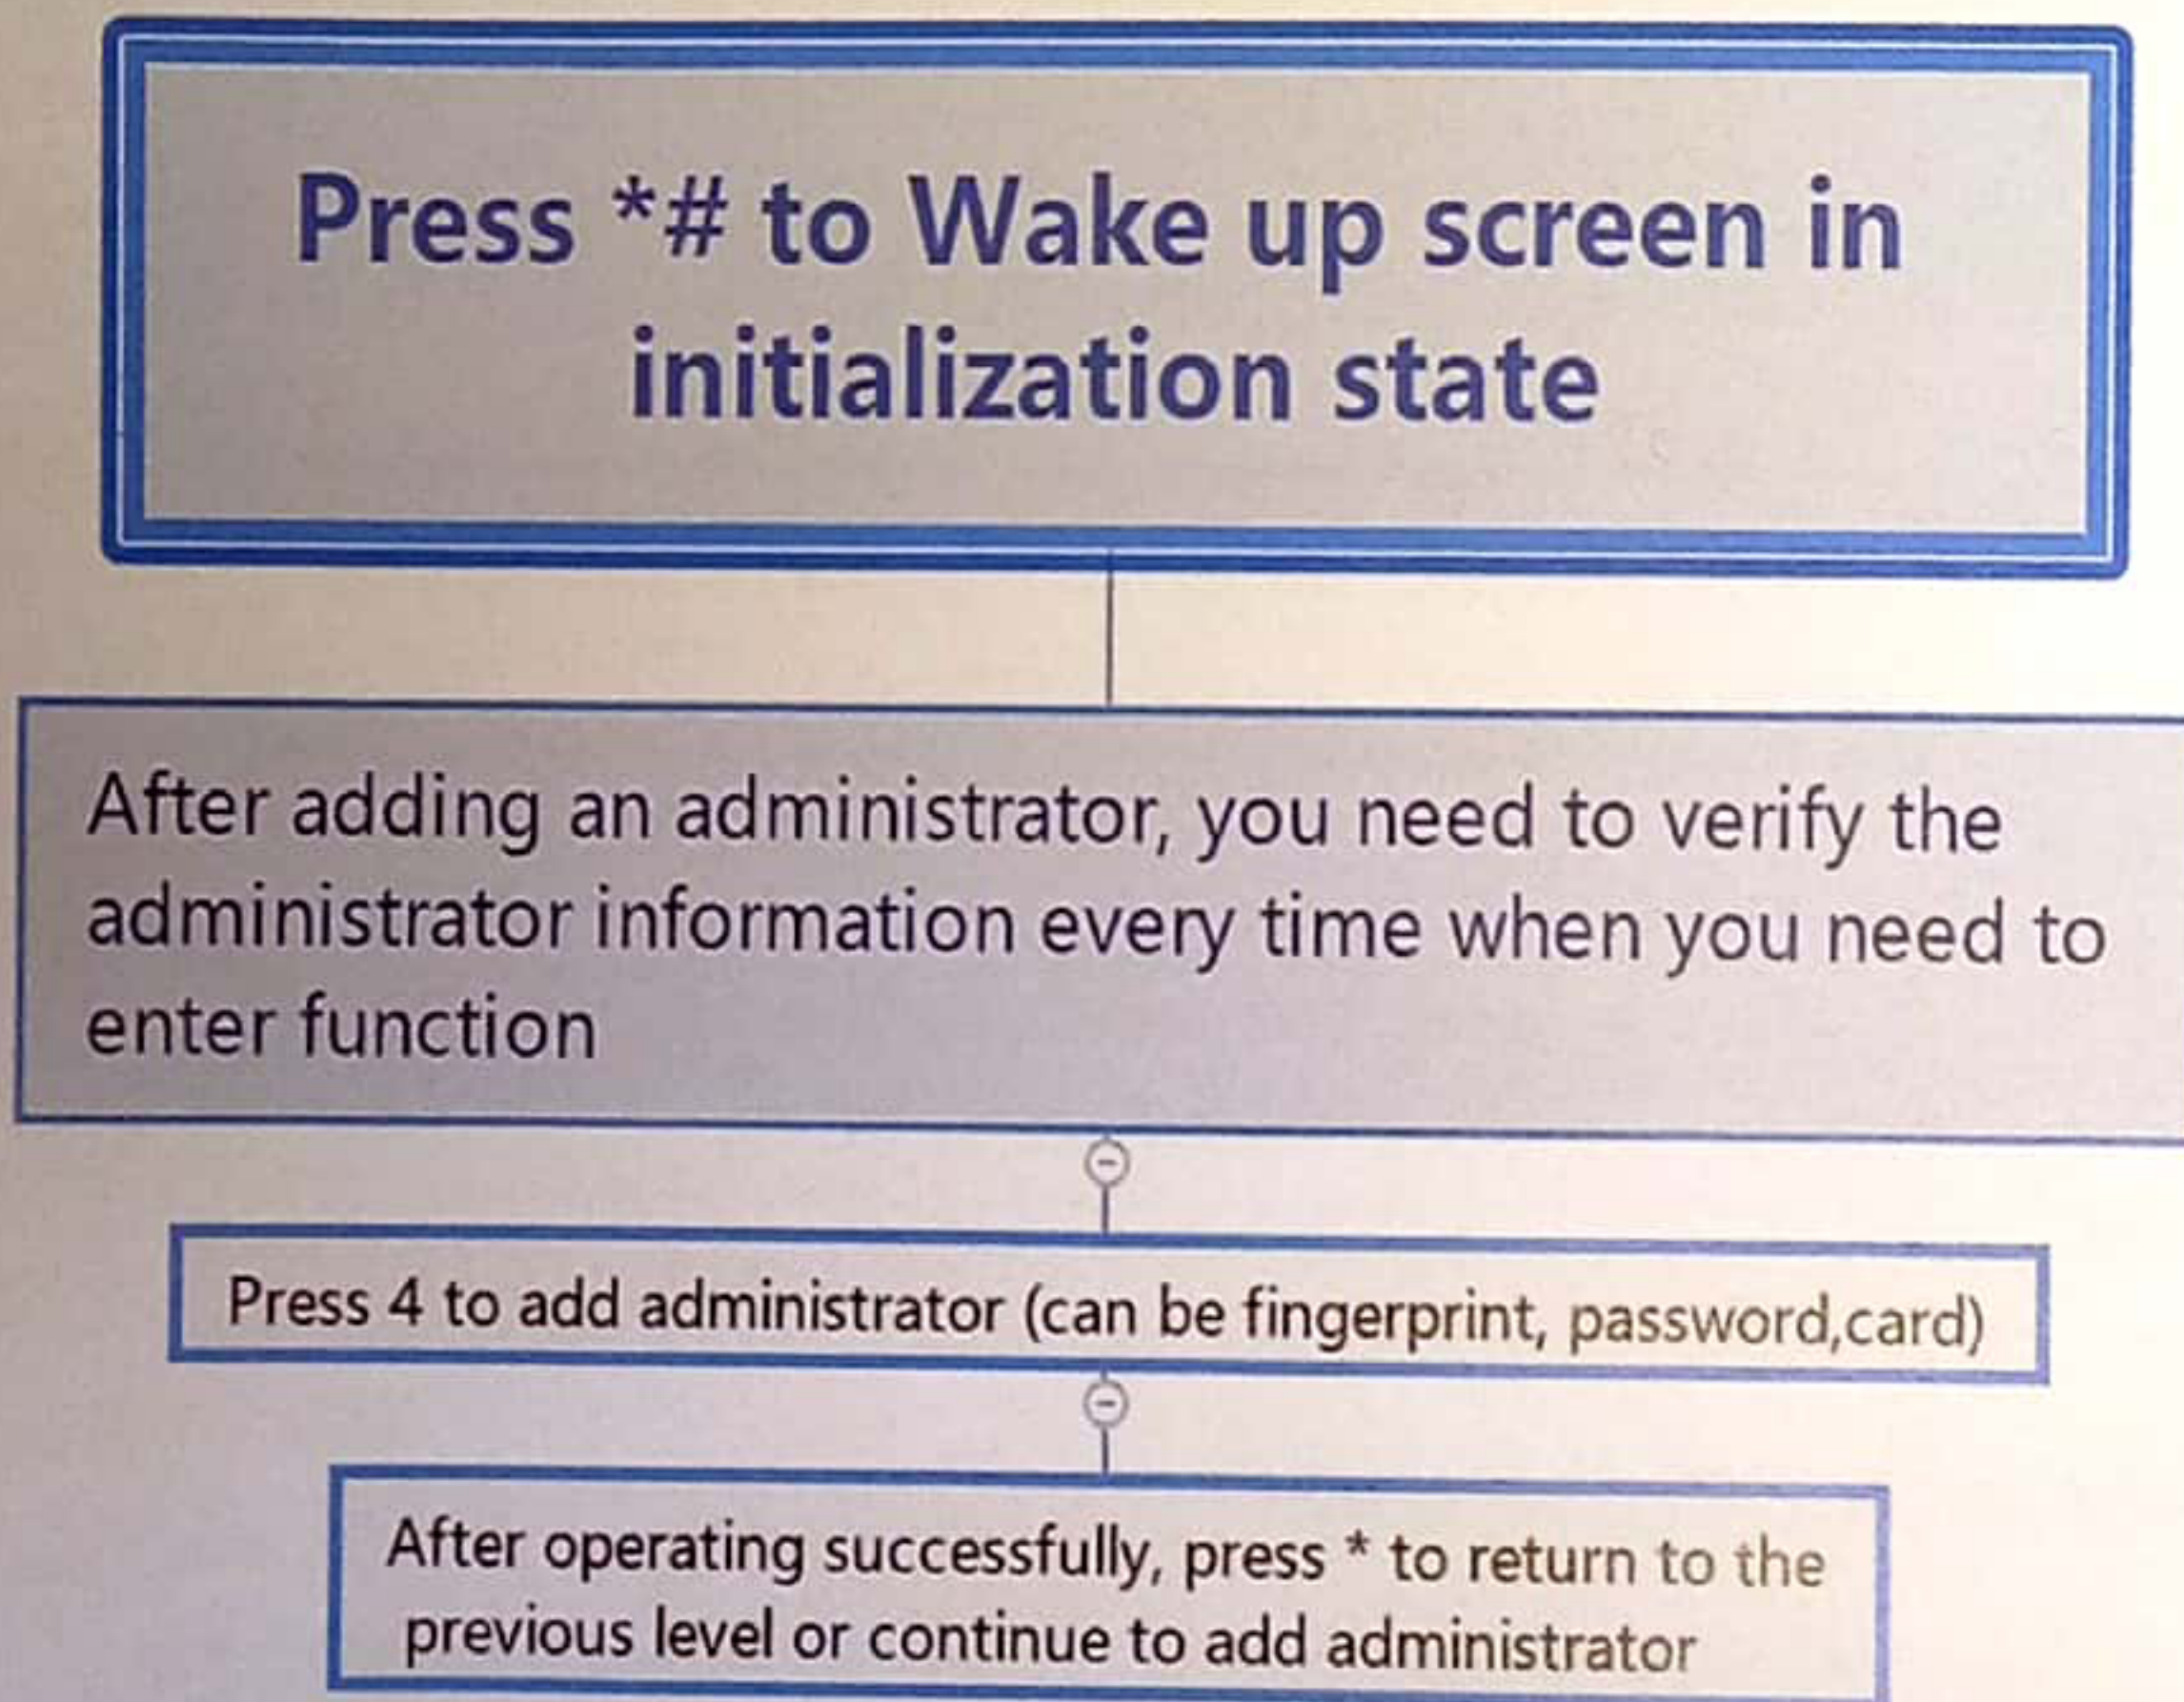


Function Management(Connect WiFi)

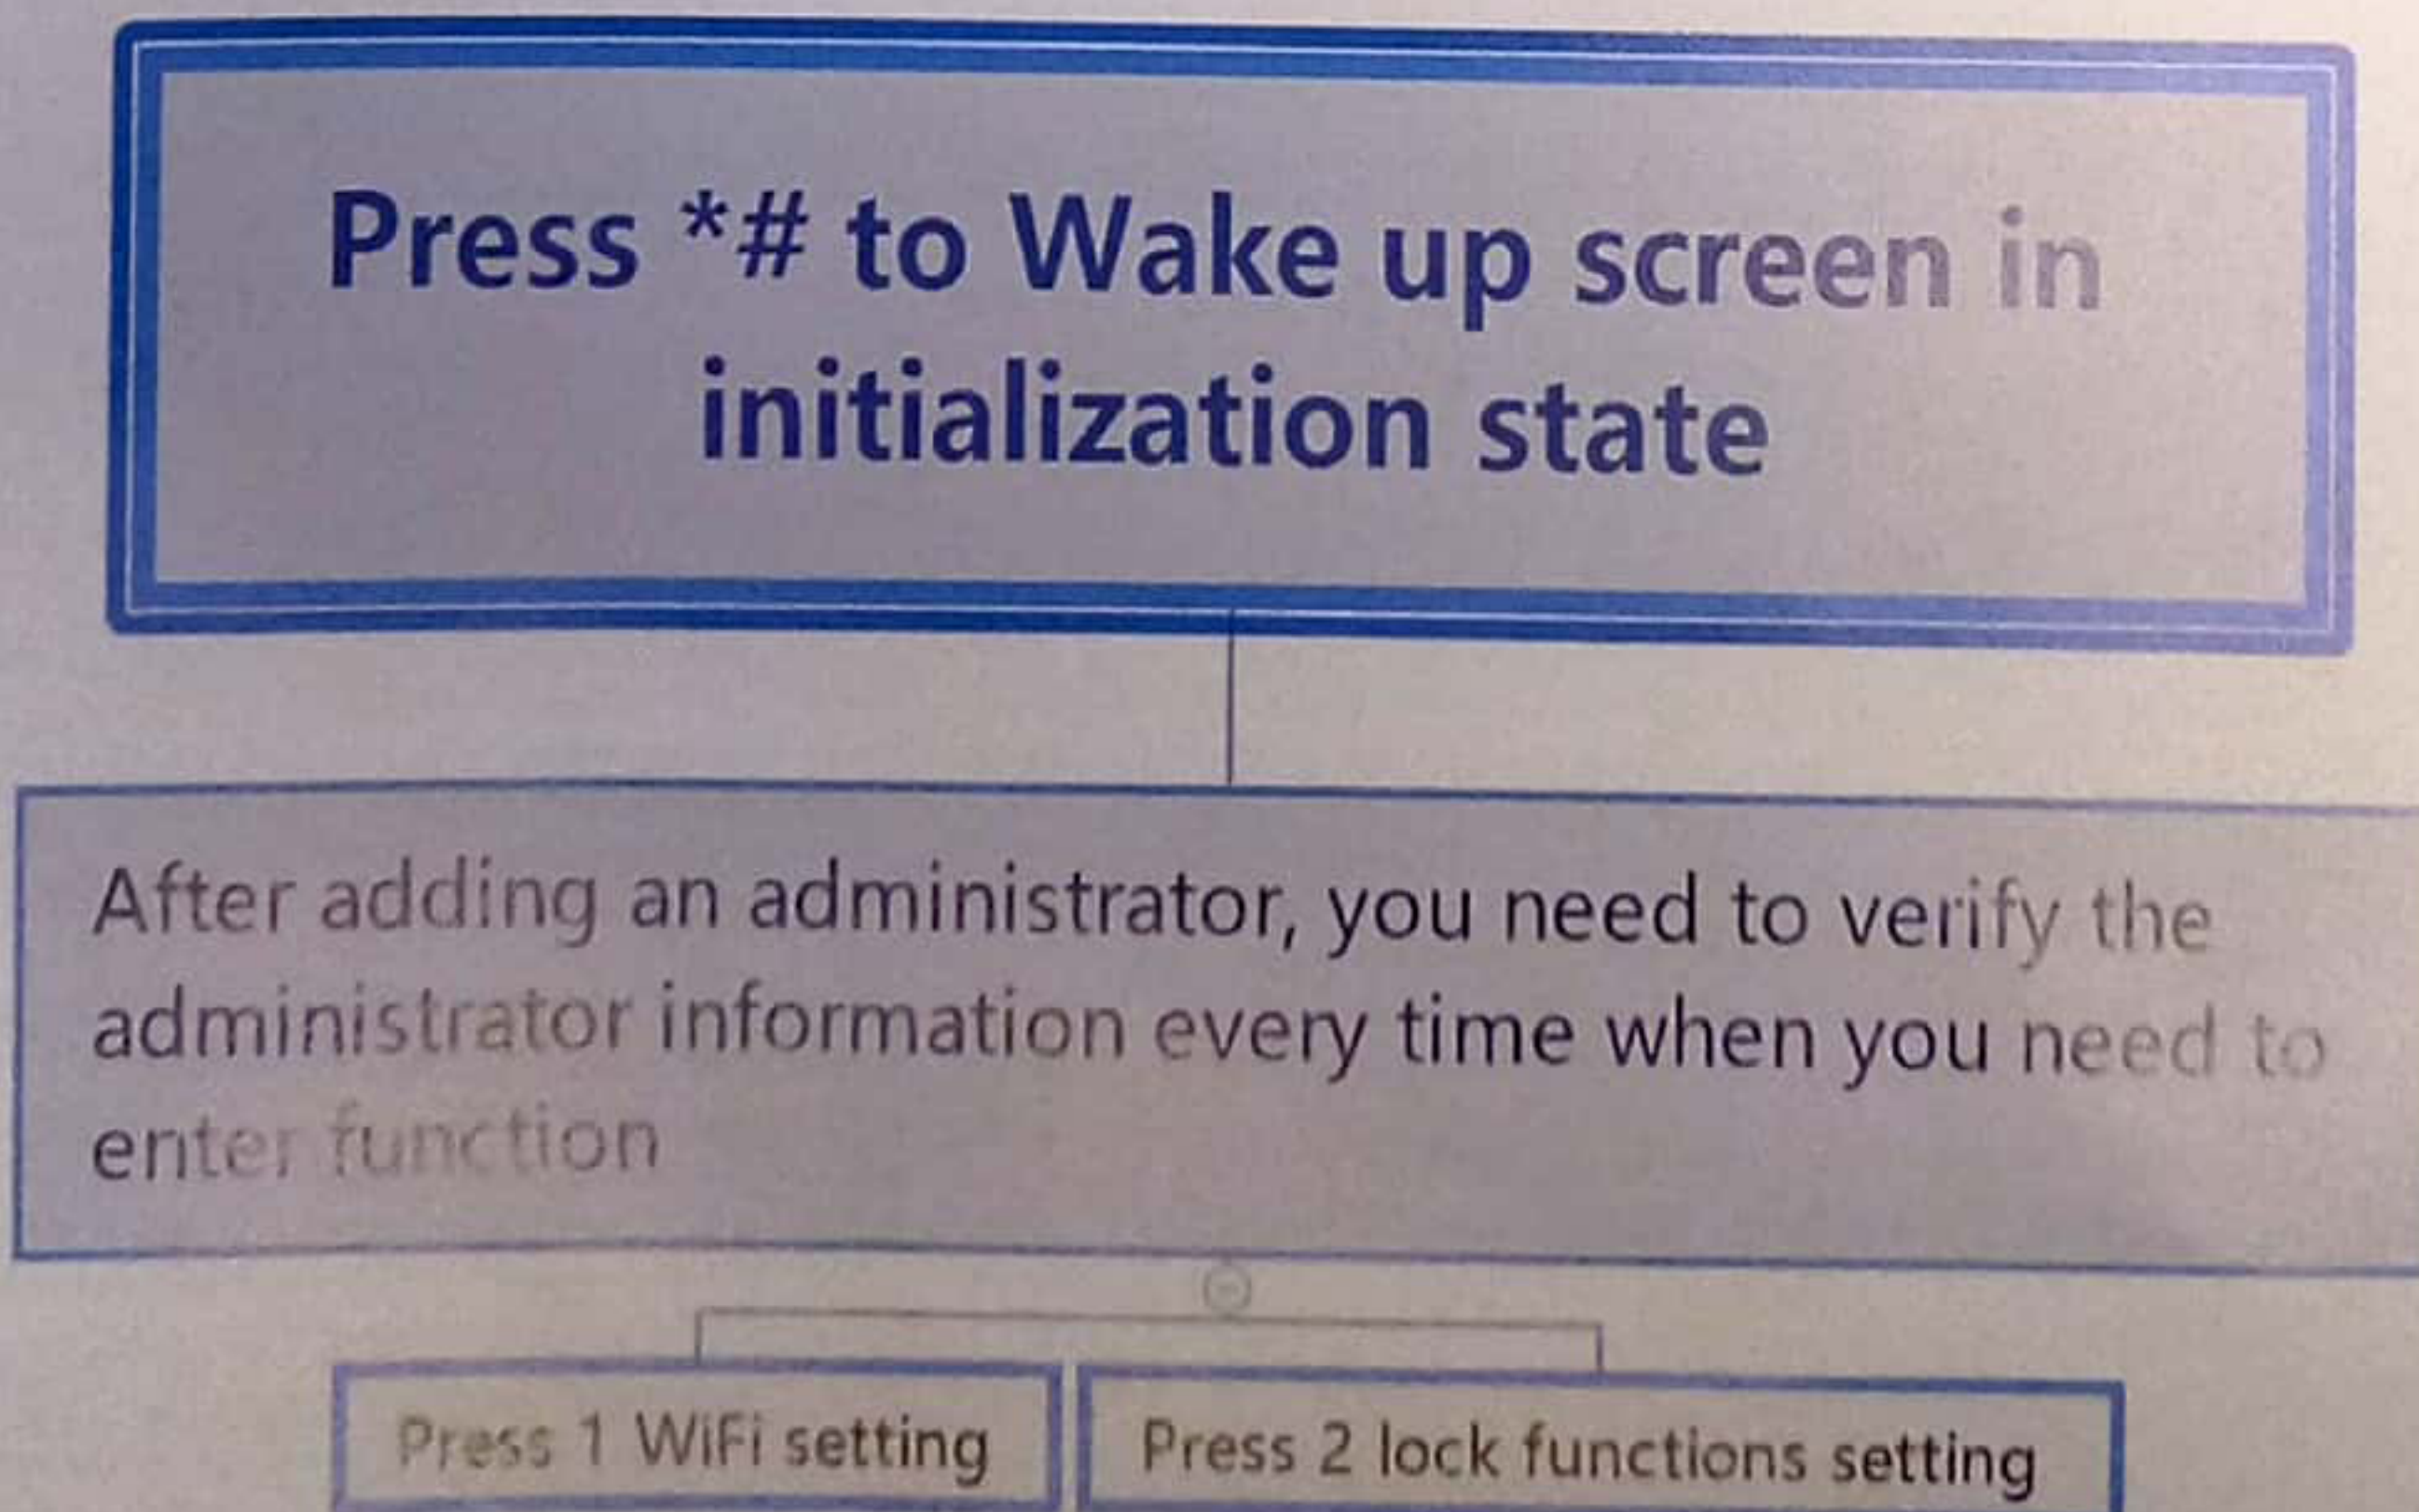

Maintenance Menu

For installation and adjustment personnel to use, please be careful

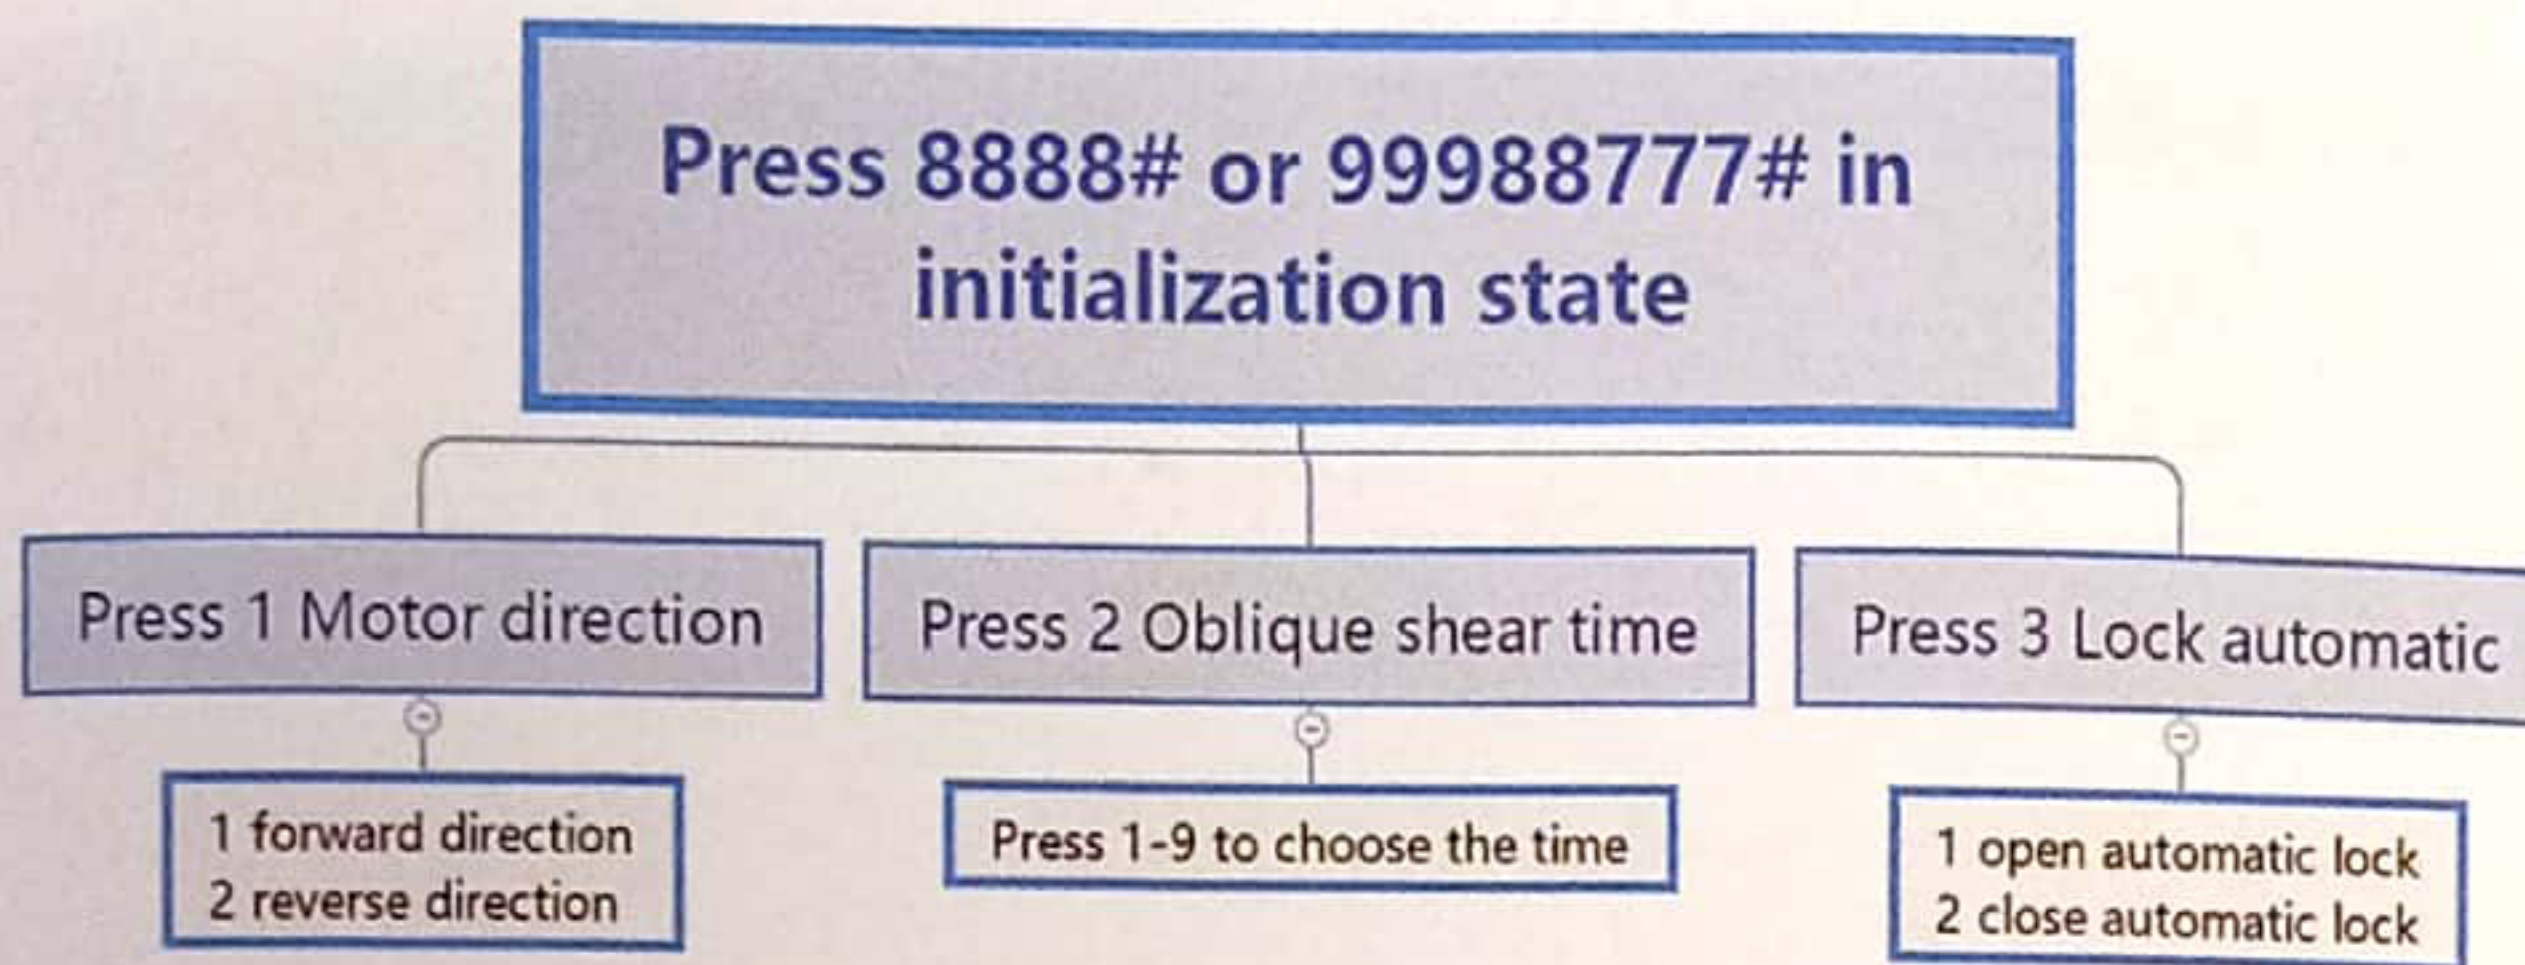


Restore Factory Setting

Press the needle into the hole(rear panel) for 5 seconds, don't loosen.



USmart GO APP CONNECTING TUTORIAL

APP Remote Unlock



1. Download "usmart go" from App store(ios)/Download "usmart go" from google play(Android)

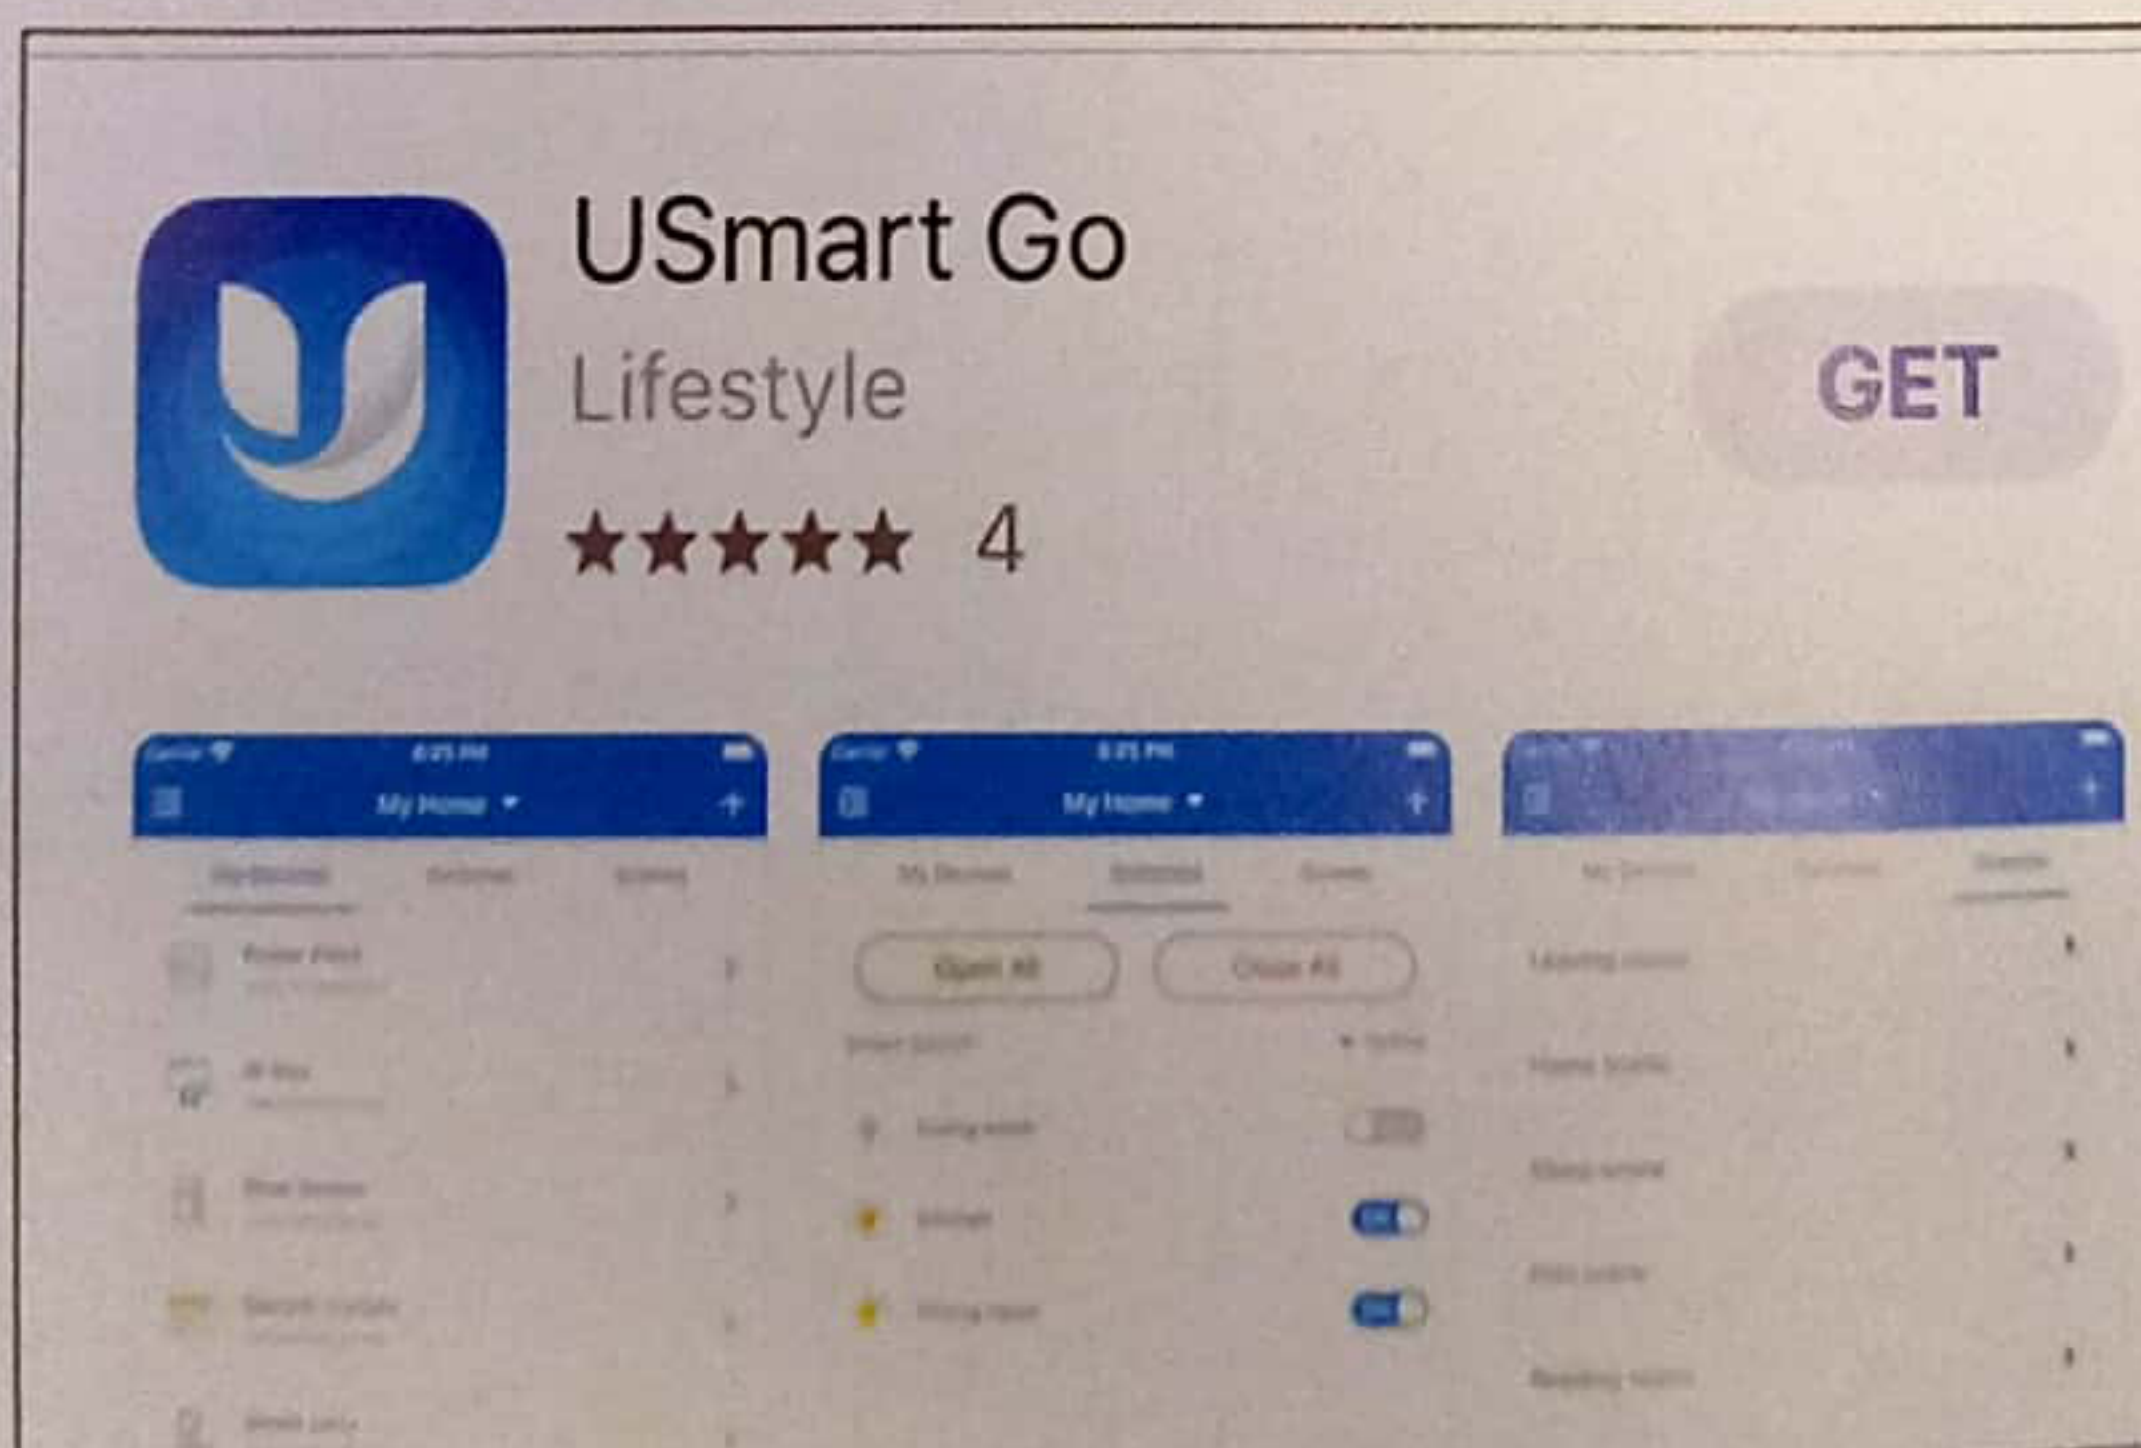

2) User registration/login. For the first time, you need to register a user, enter a mobile phone number or email address to register users; If have account, user can login in directly .

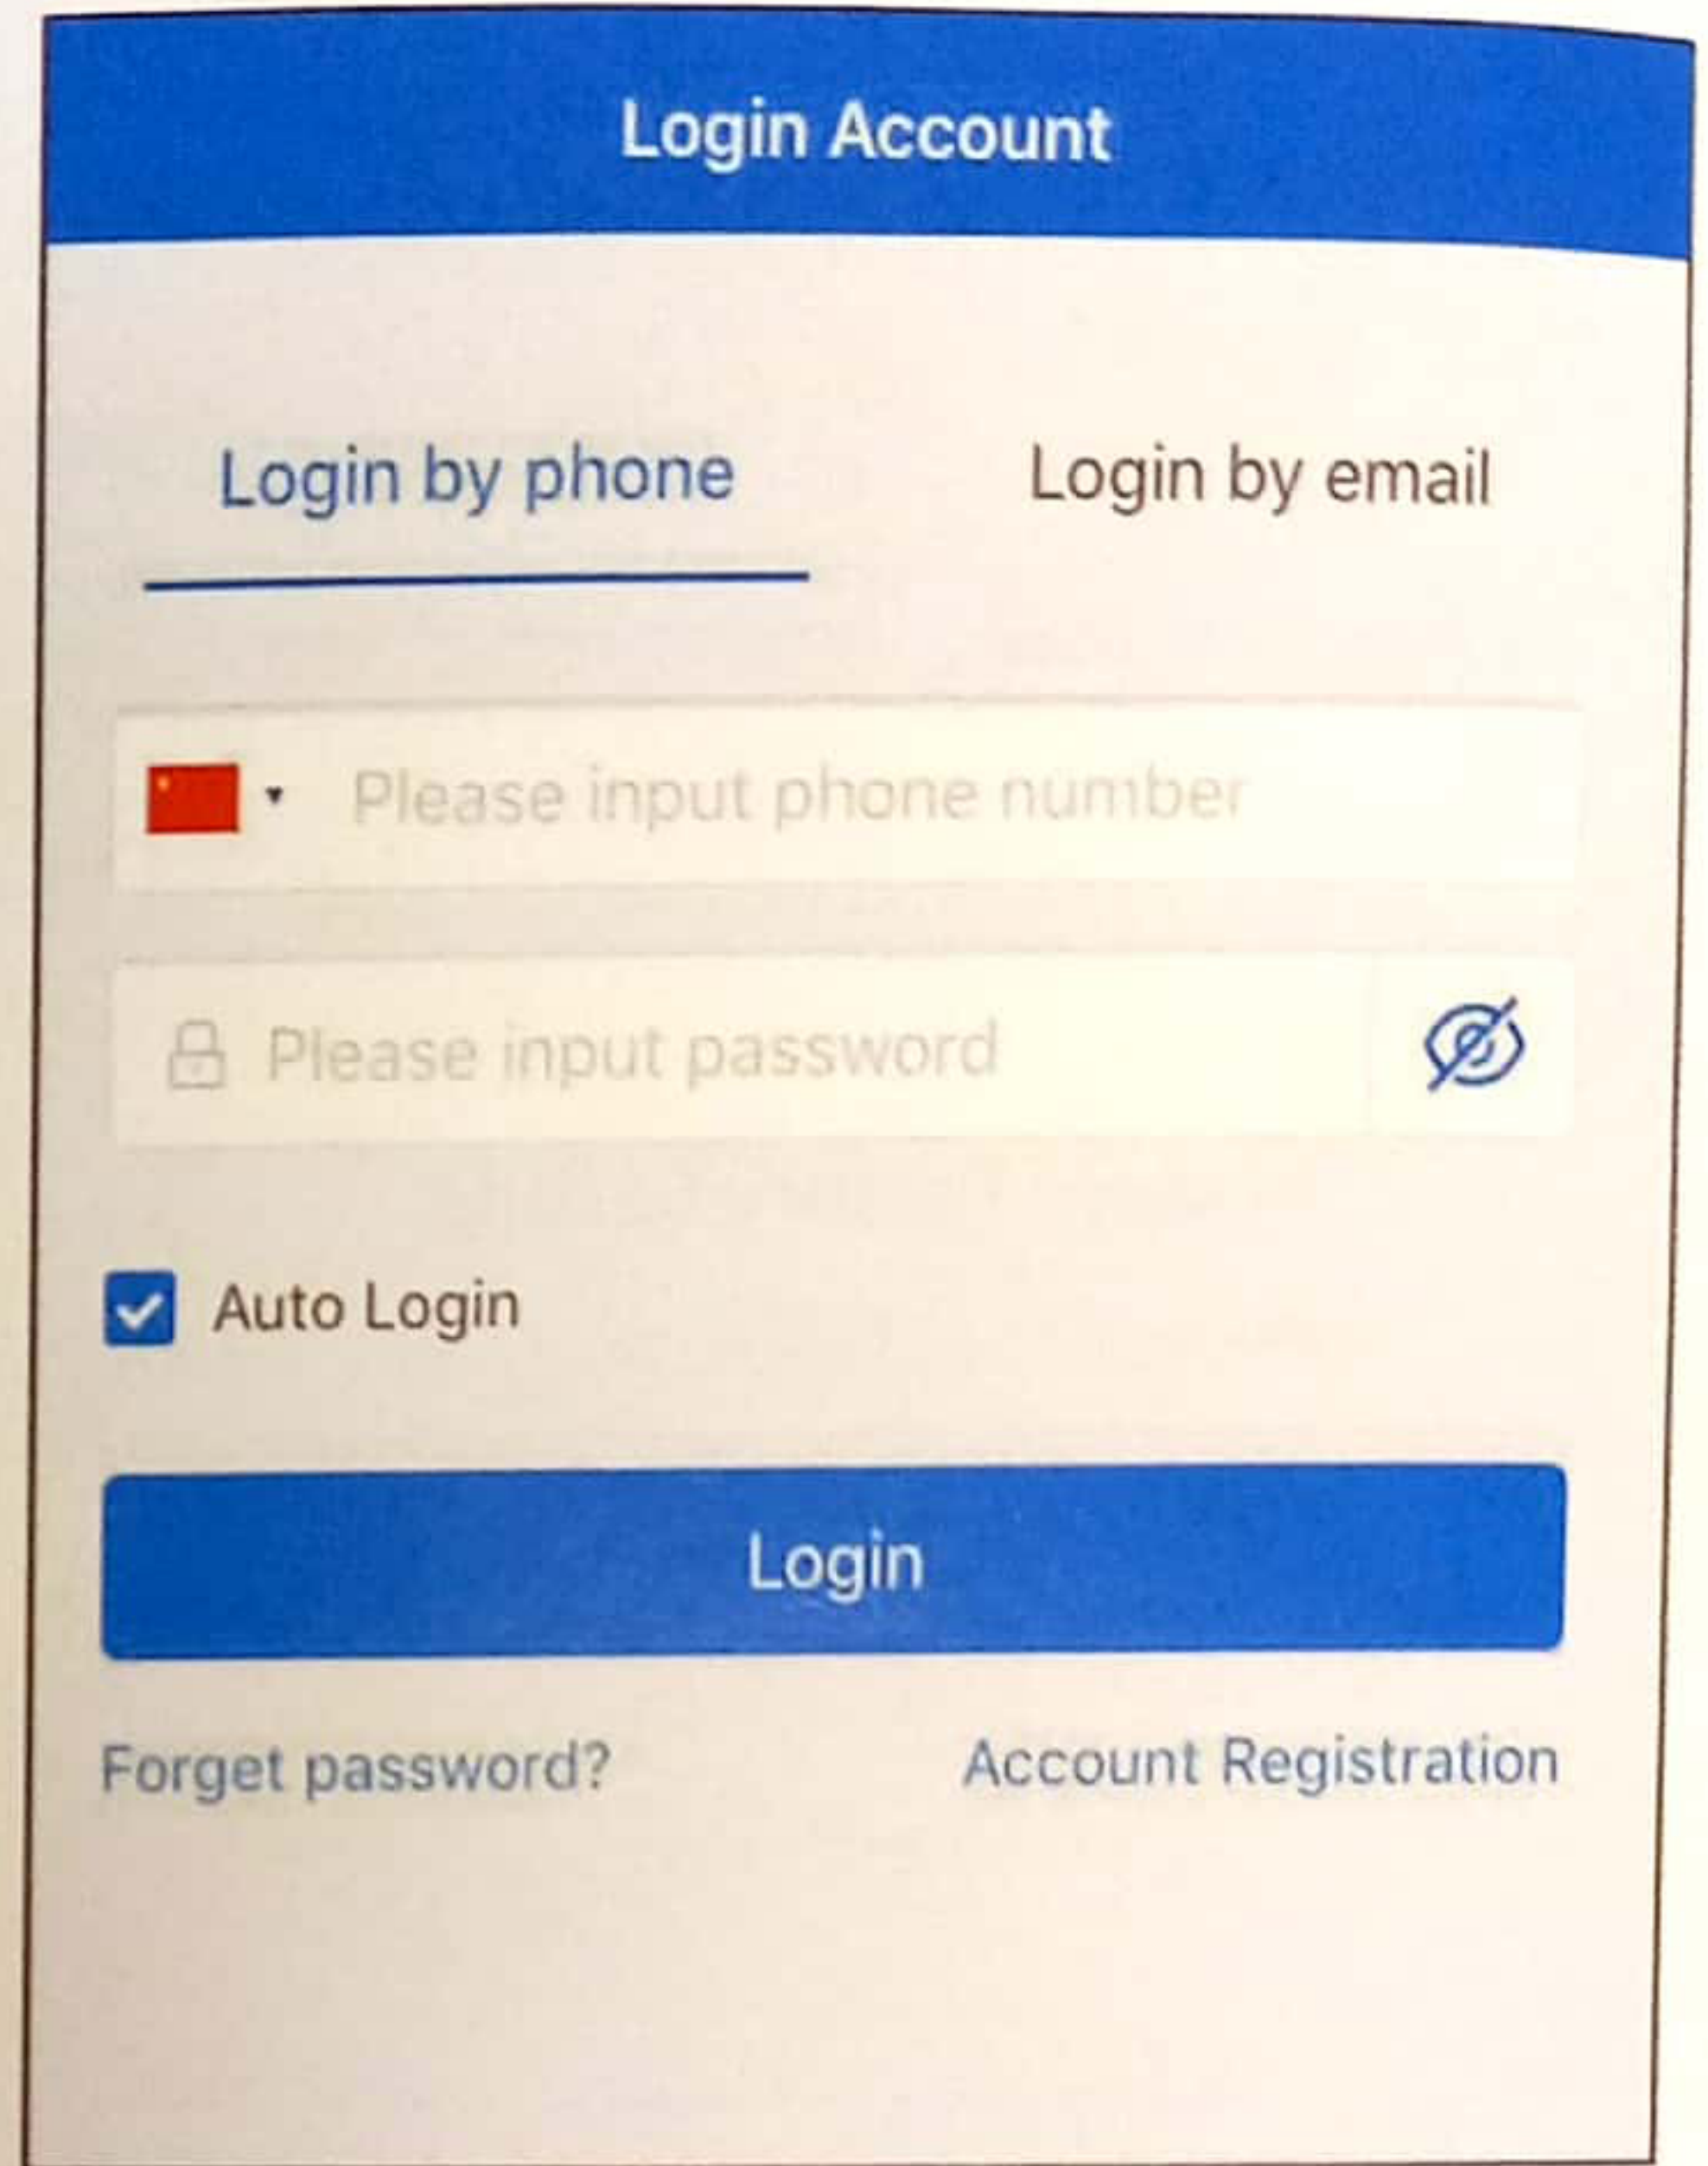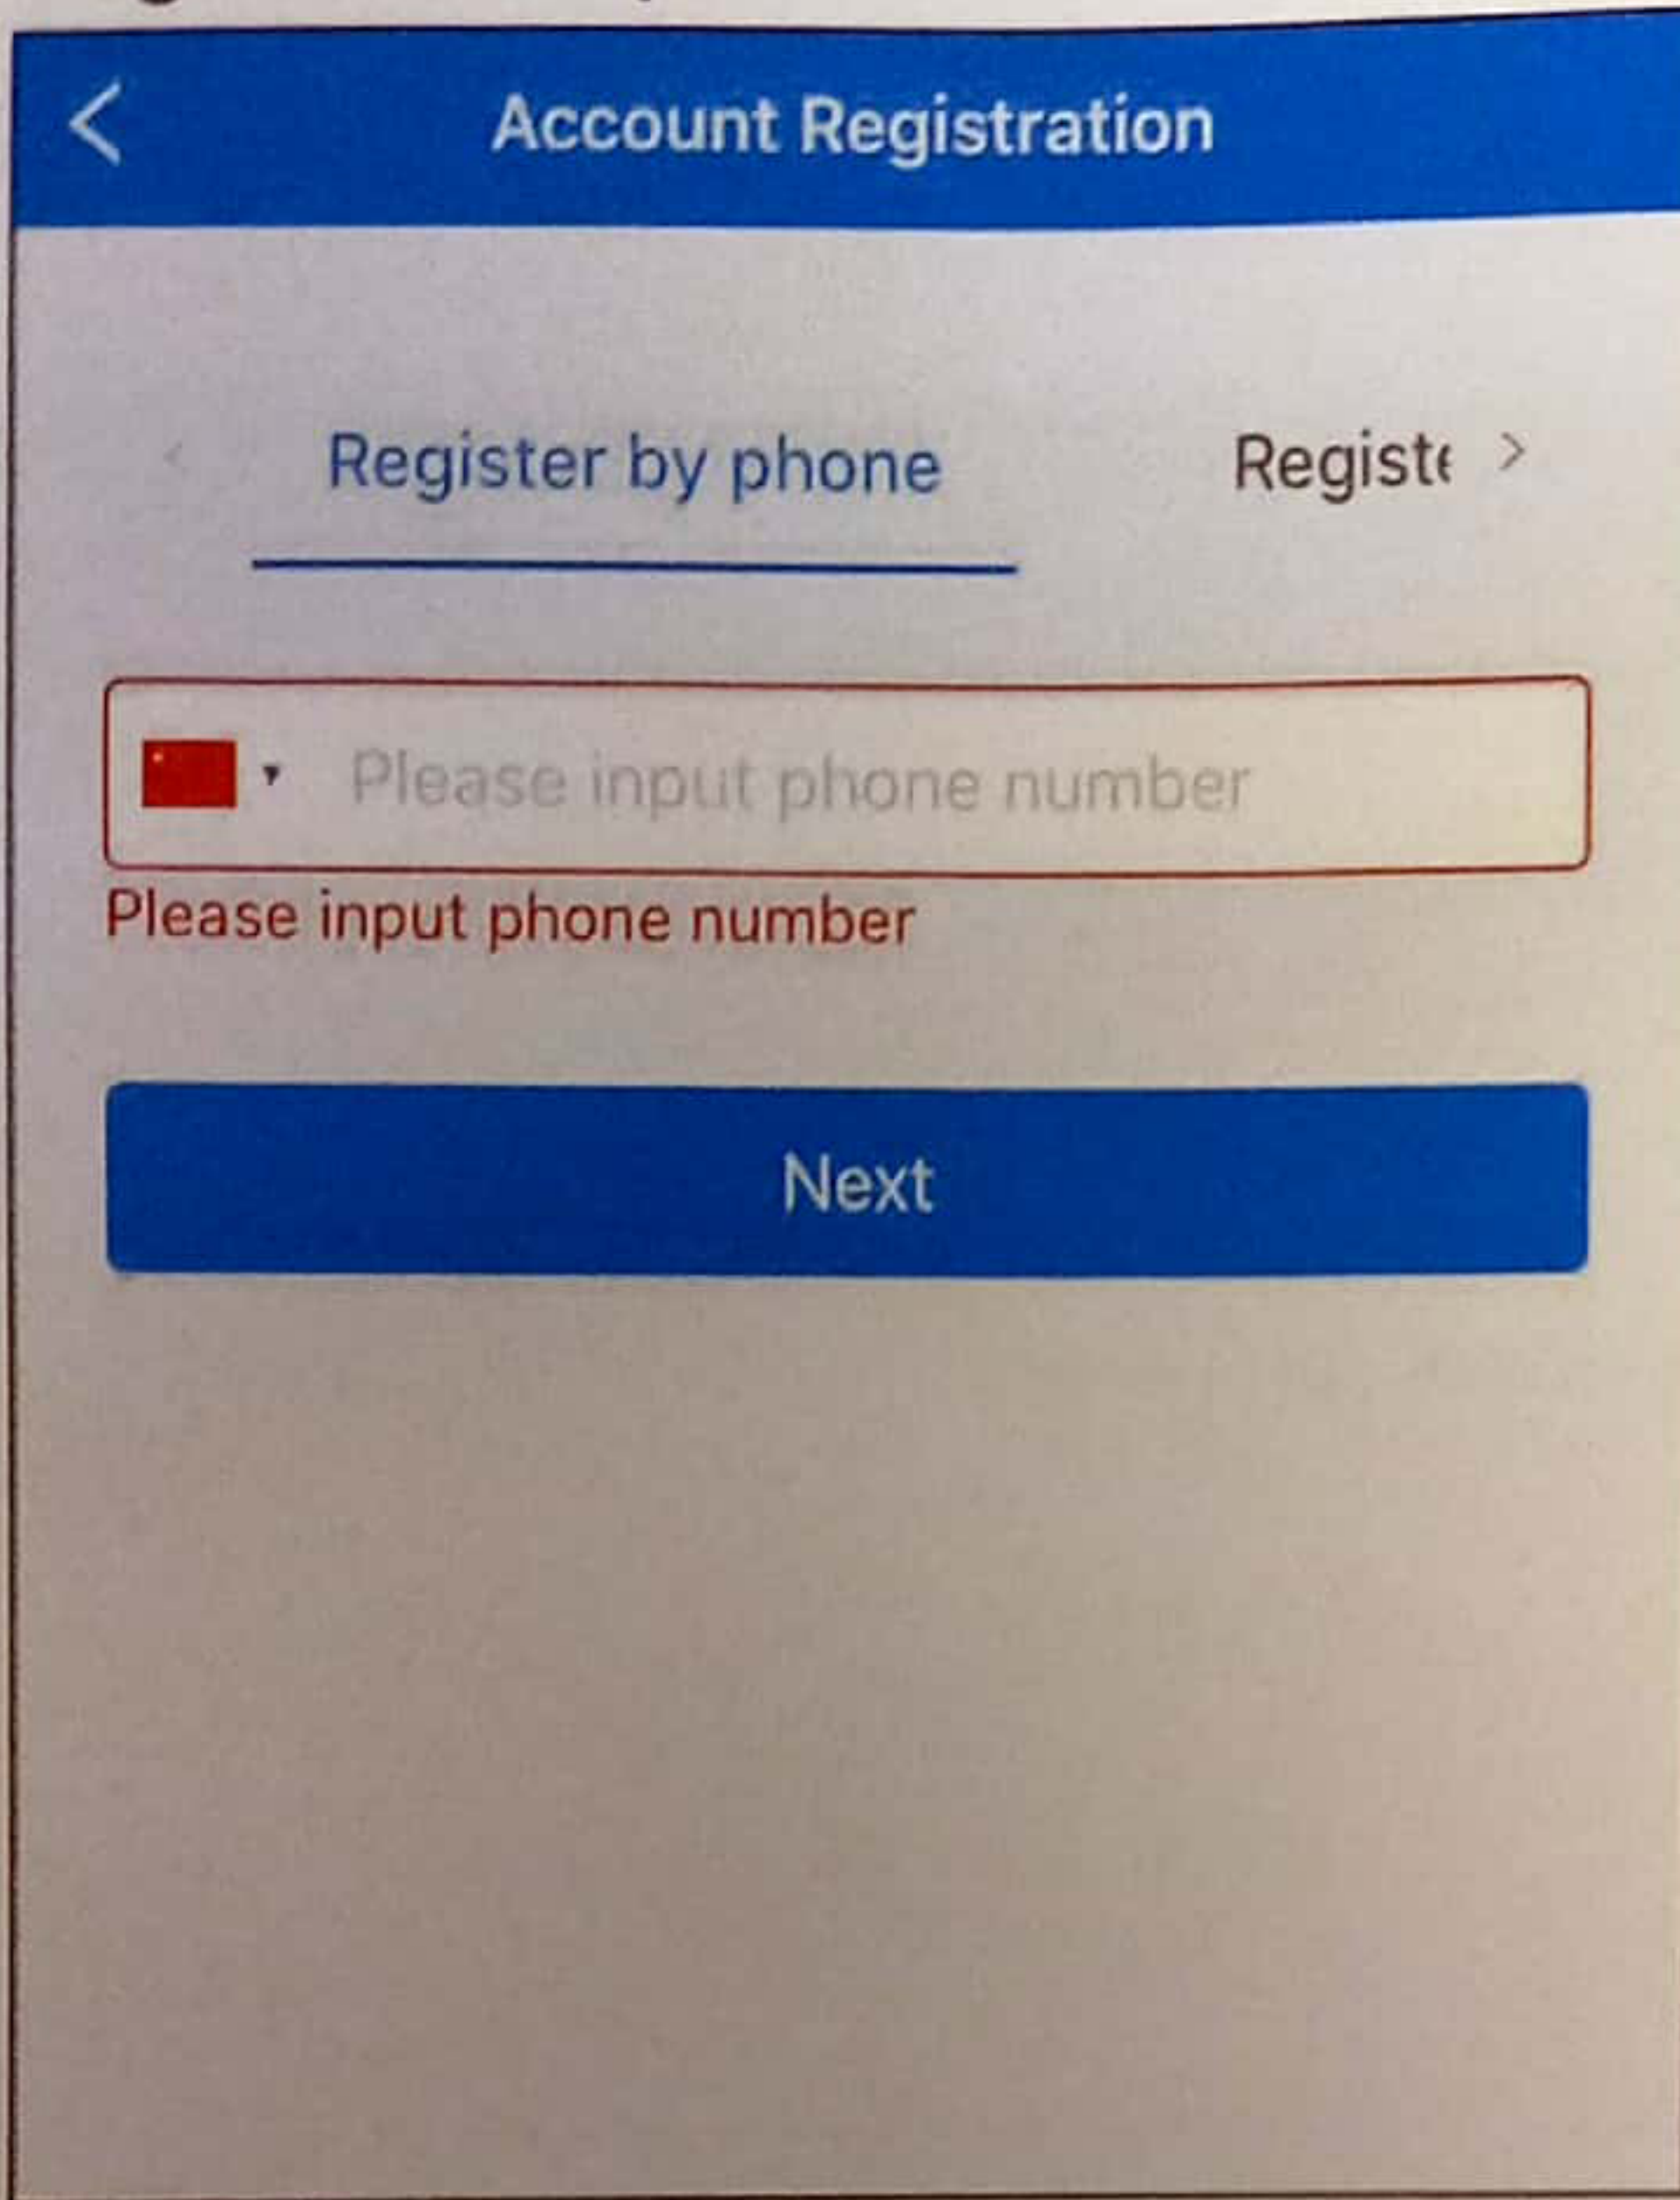



3) After logging in, click "ADD"---"Add Wi-Fi Device"

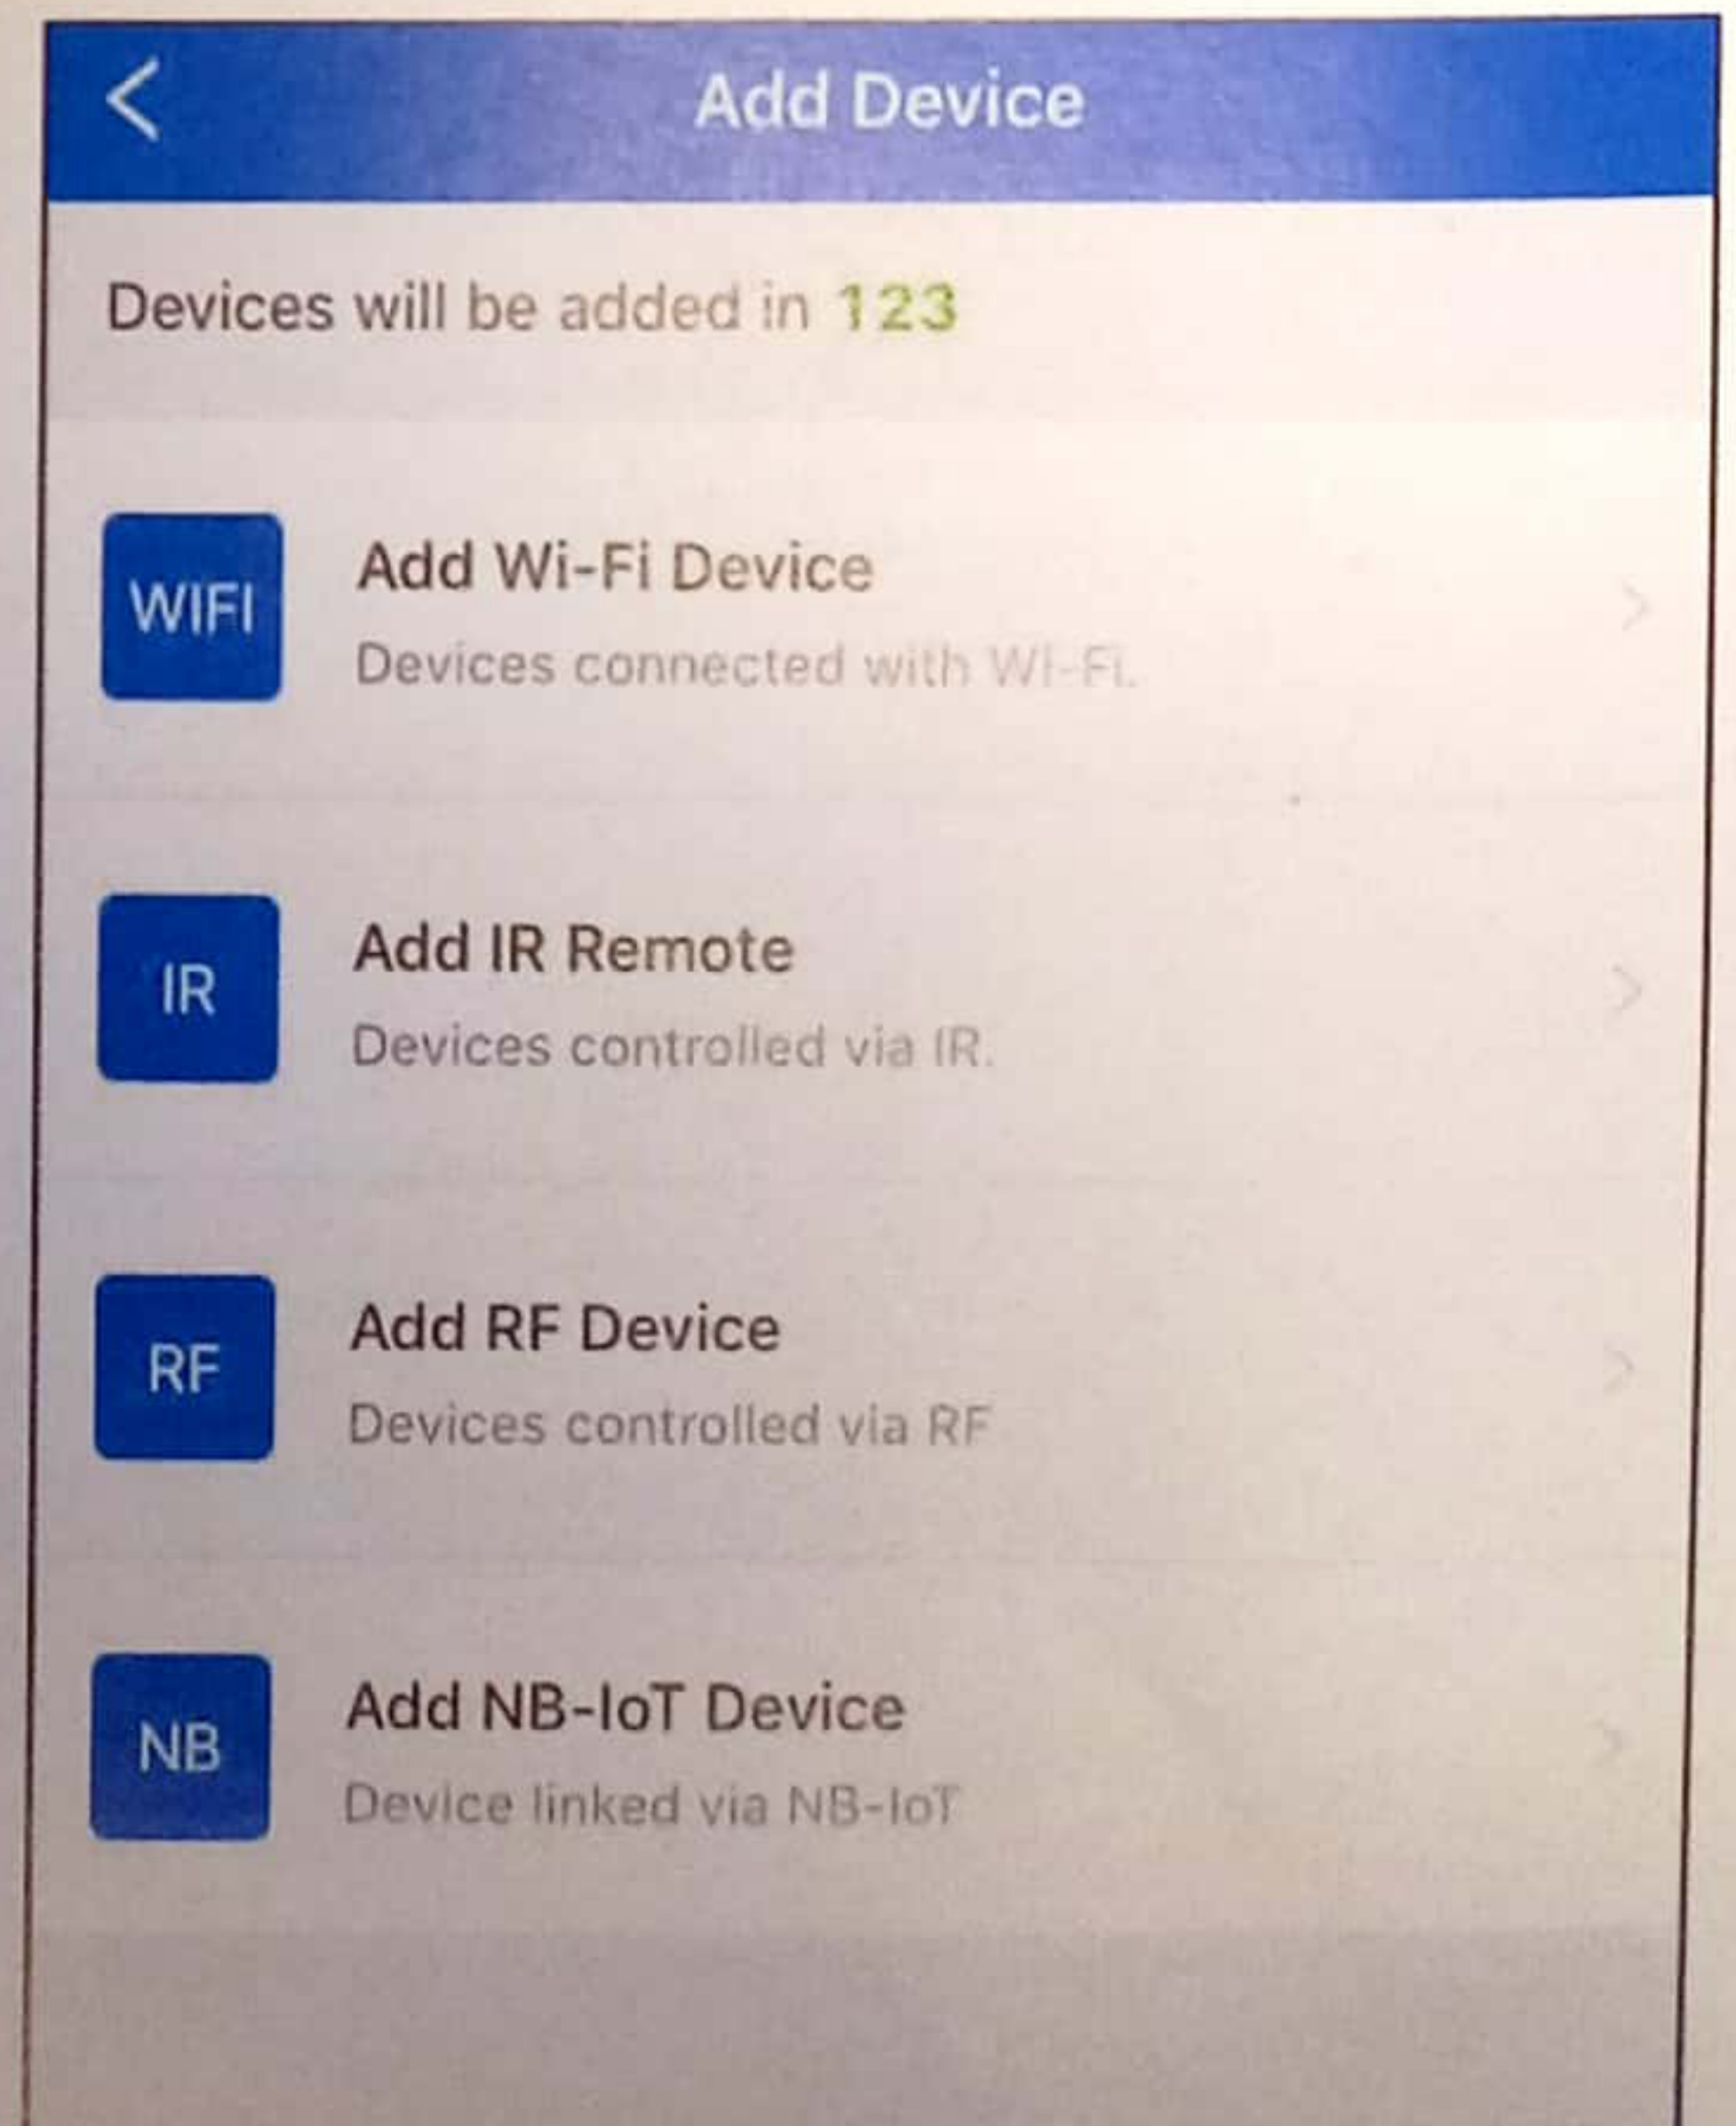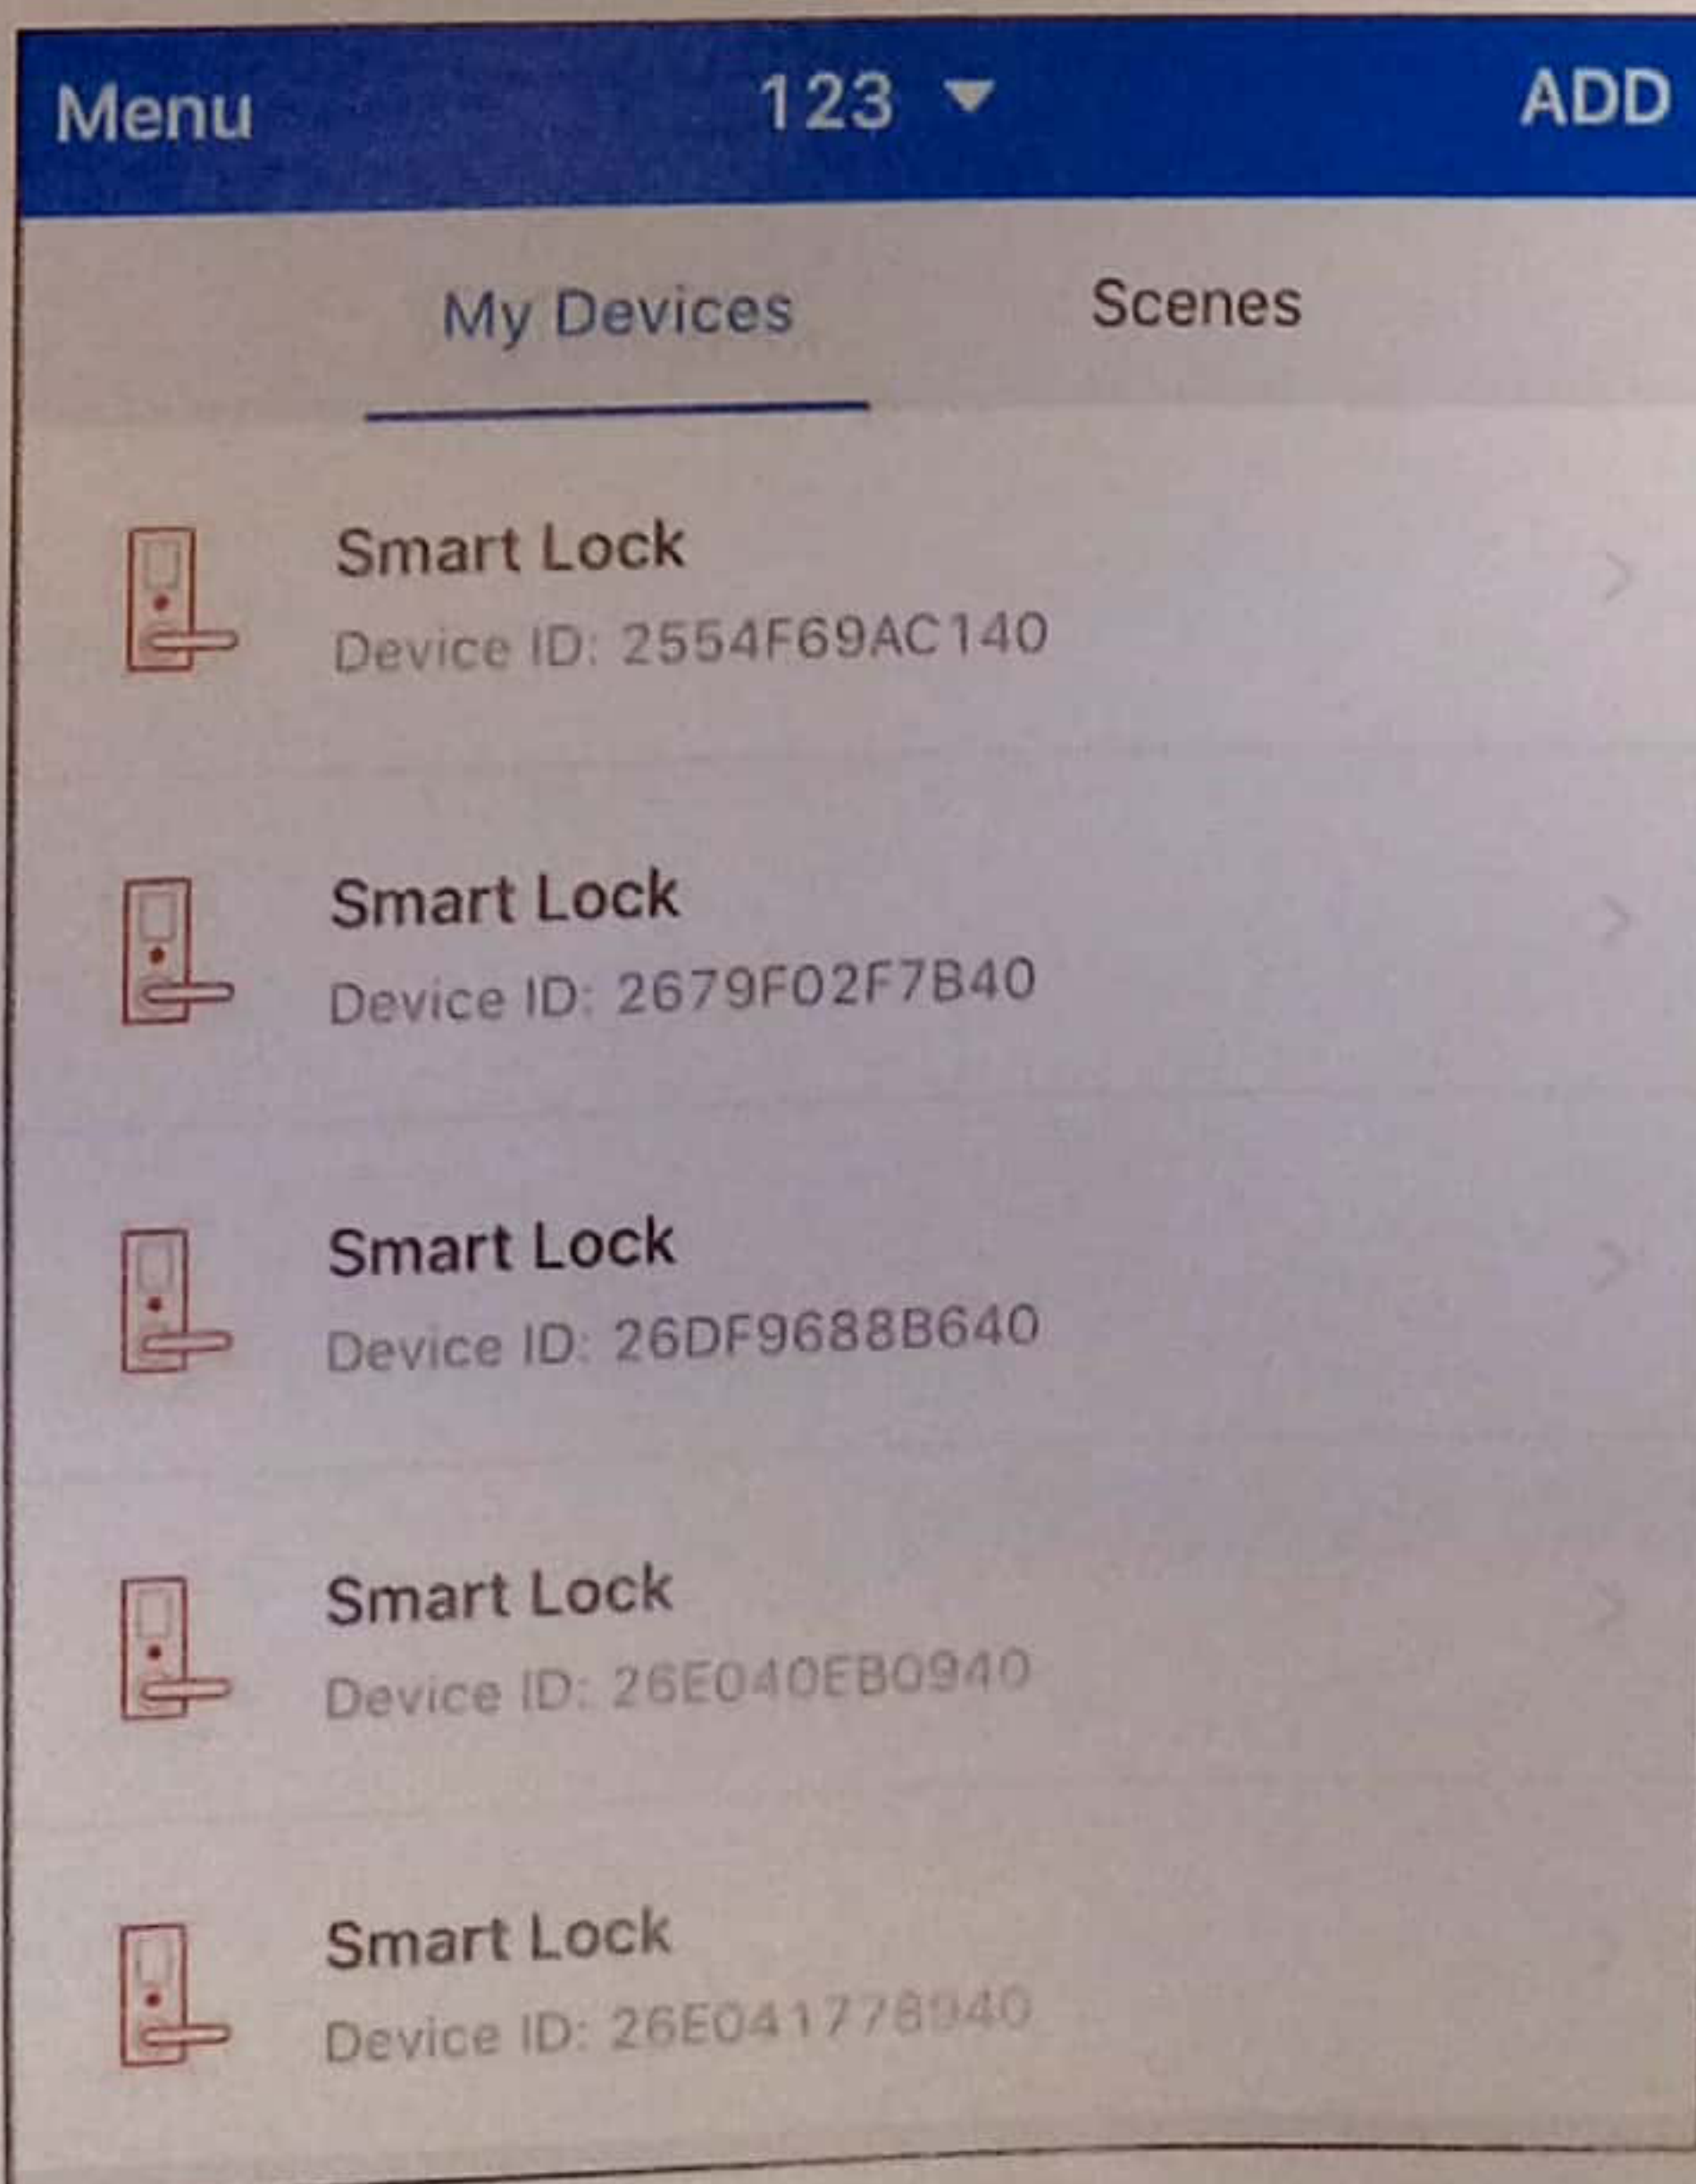

4) Back to the lock Enter "*" and "#" → enter administrator authentication(password/card/fingerprint) → Press 1




5) Back to the Usmart go App, connect the WiFi of your home

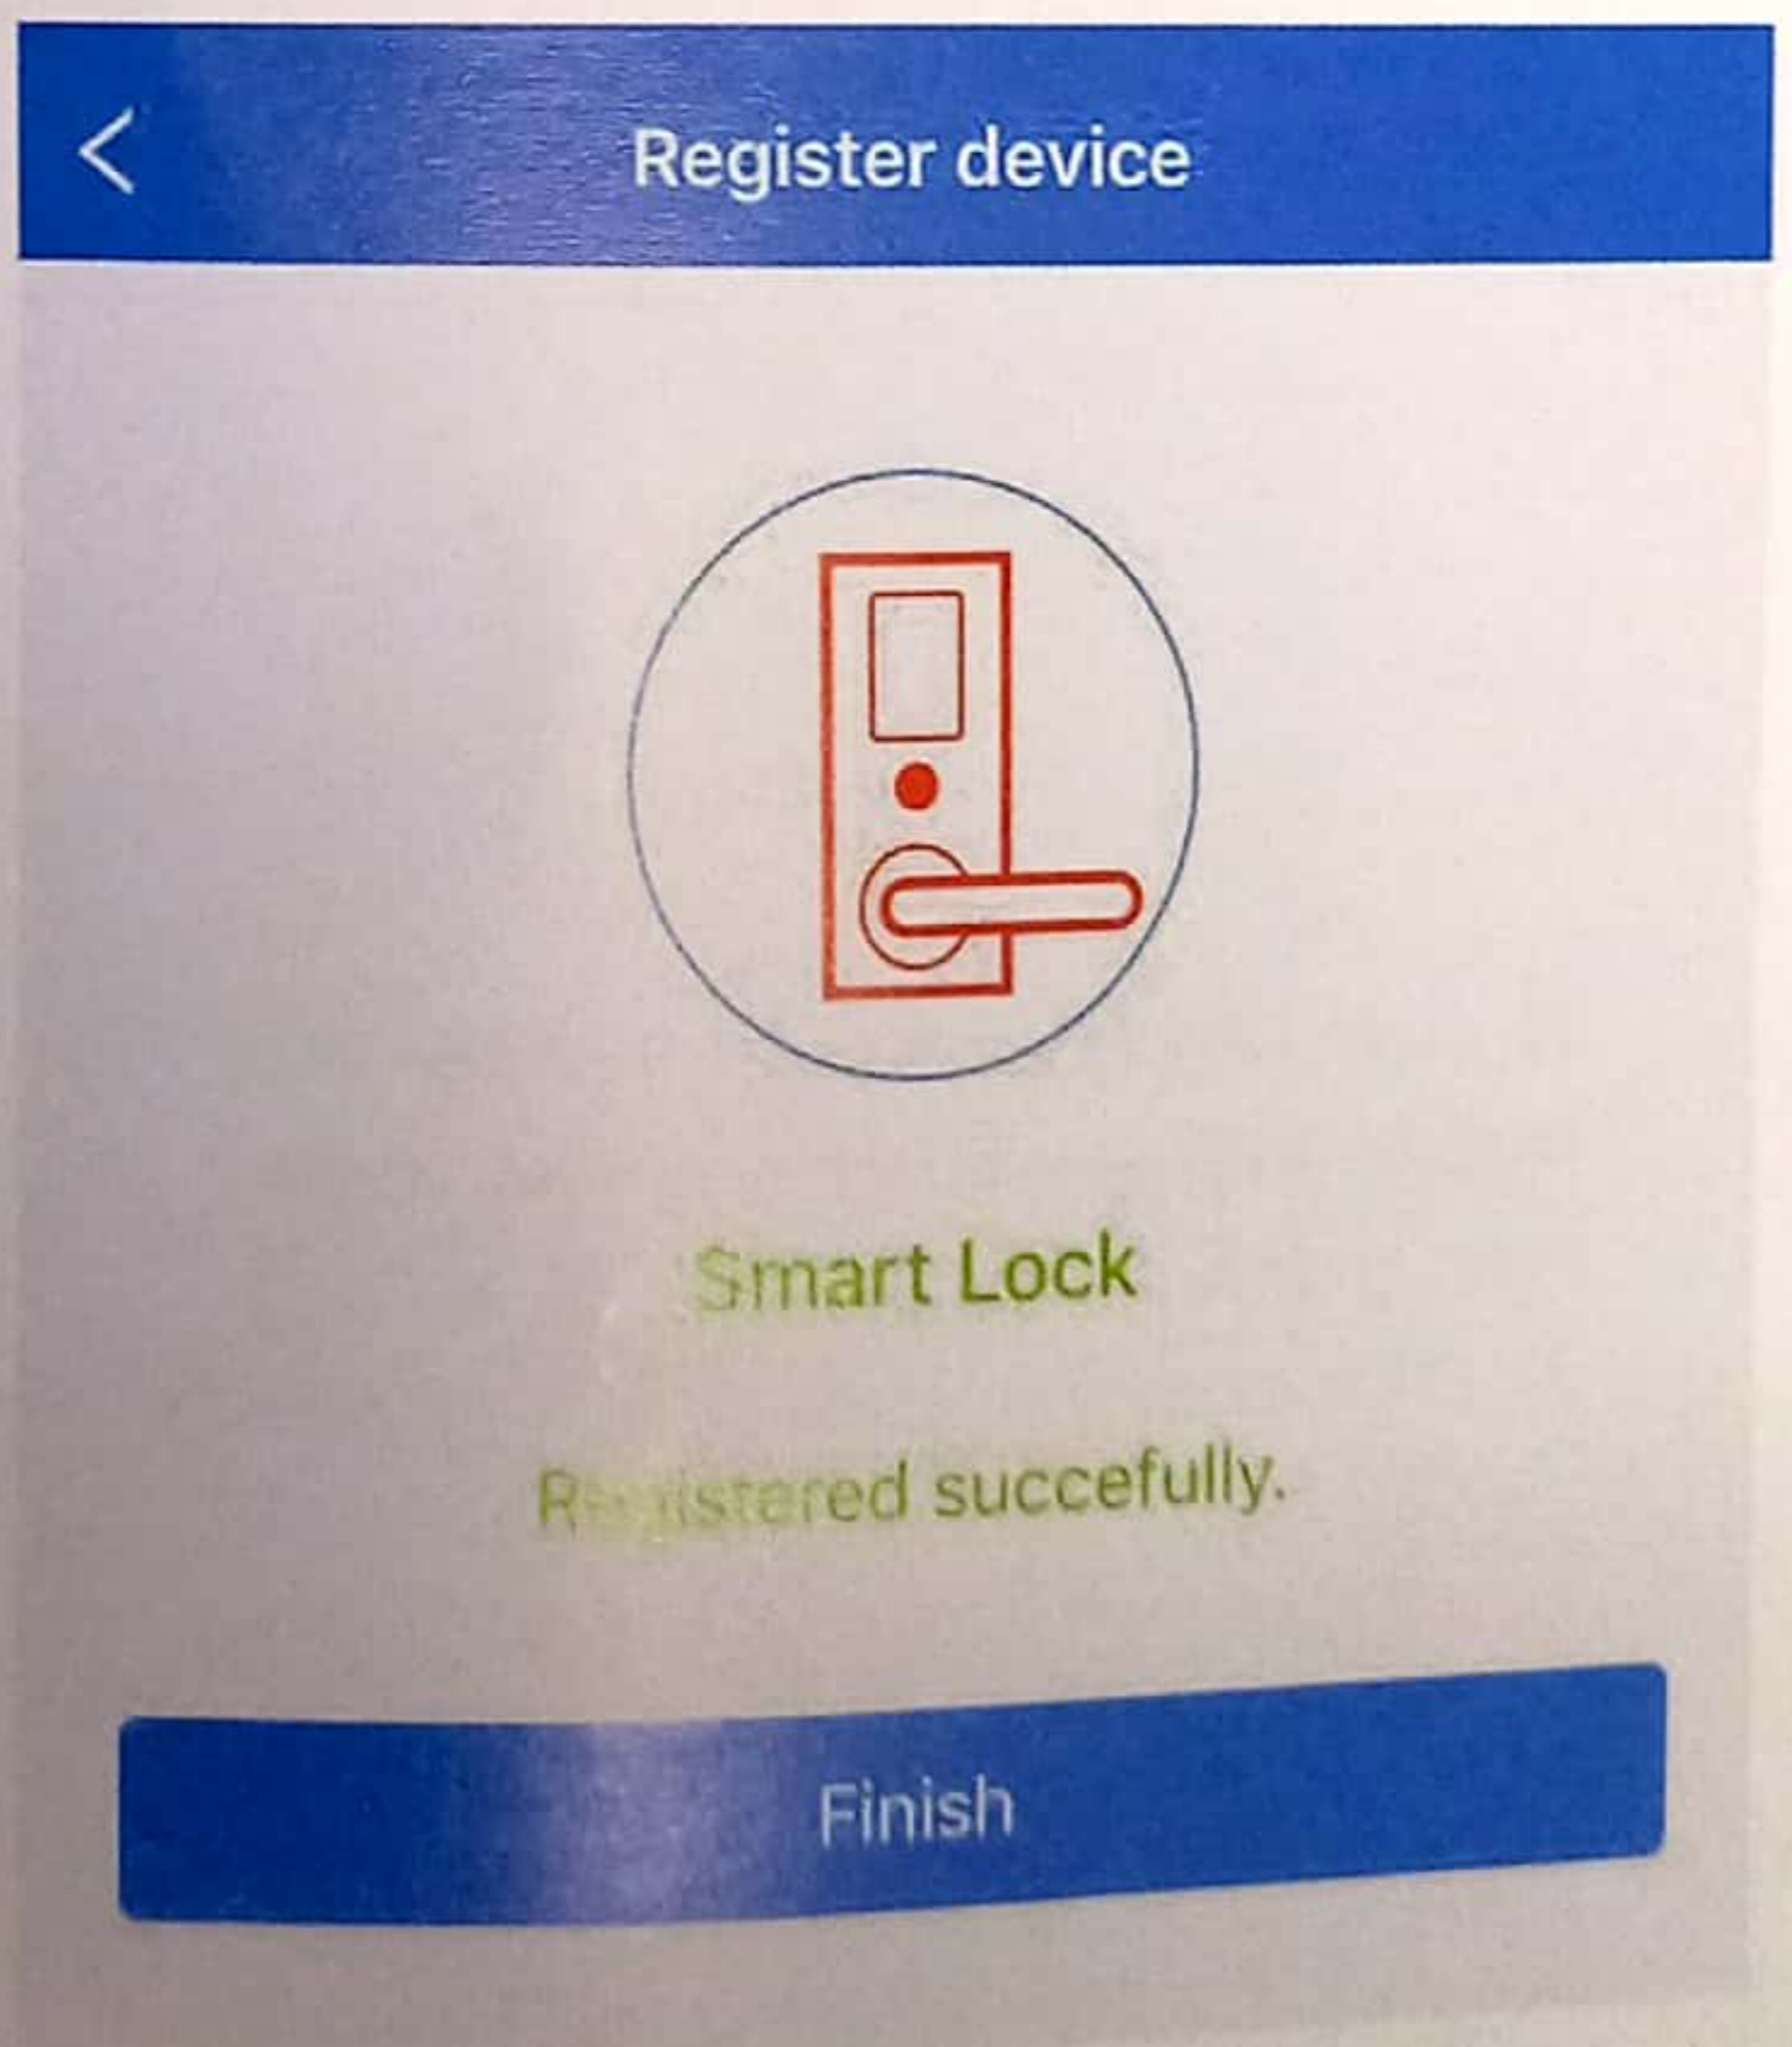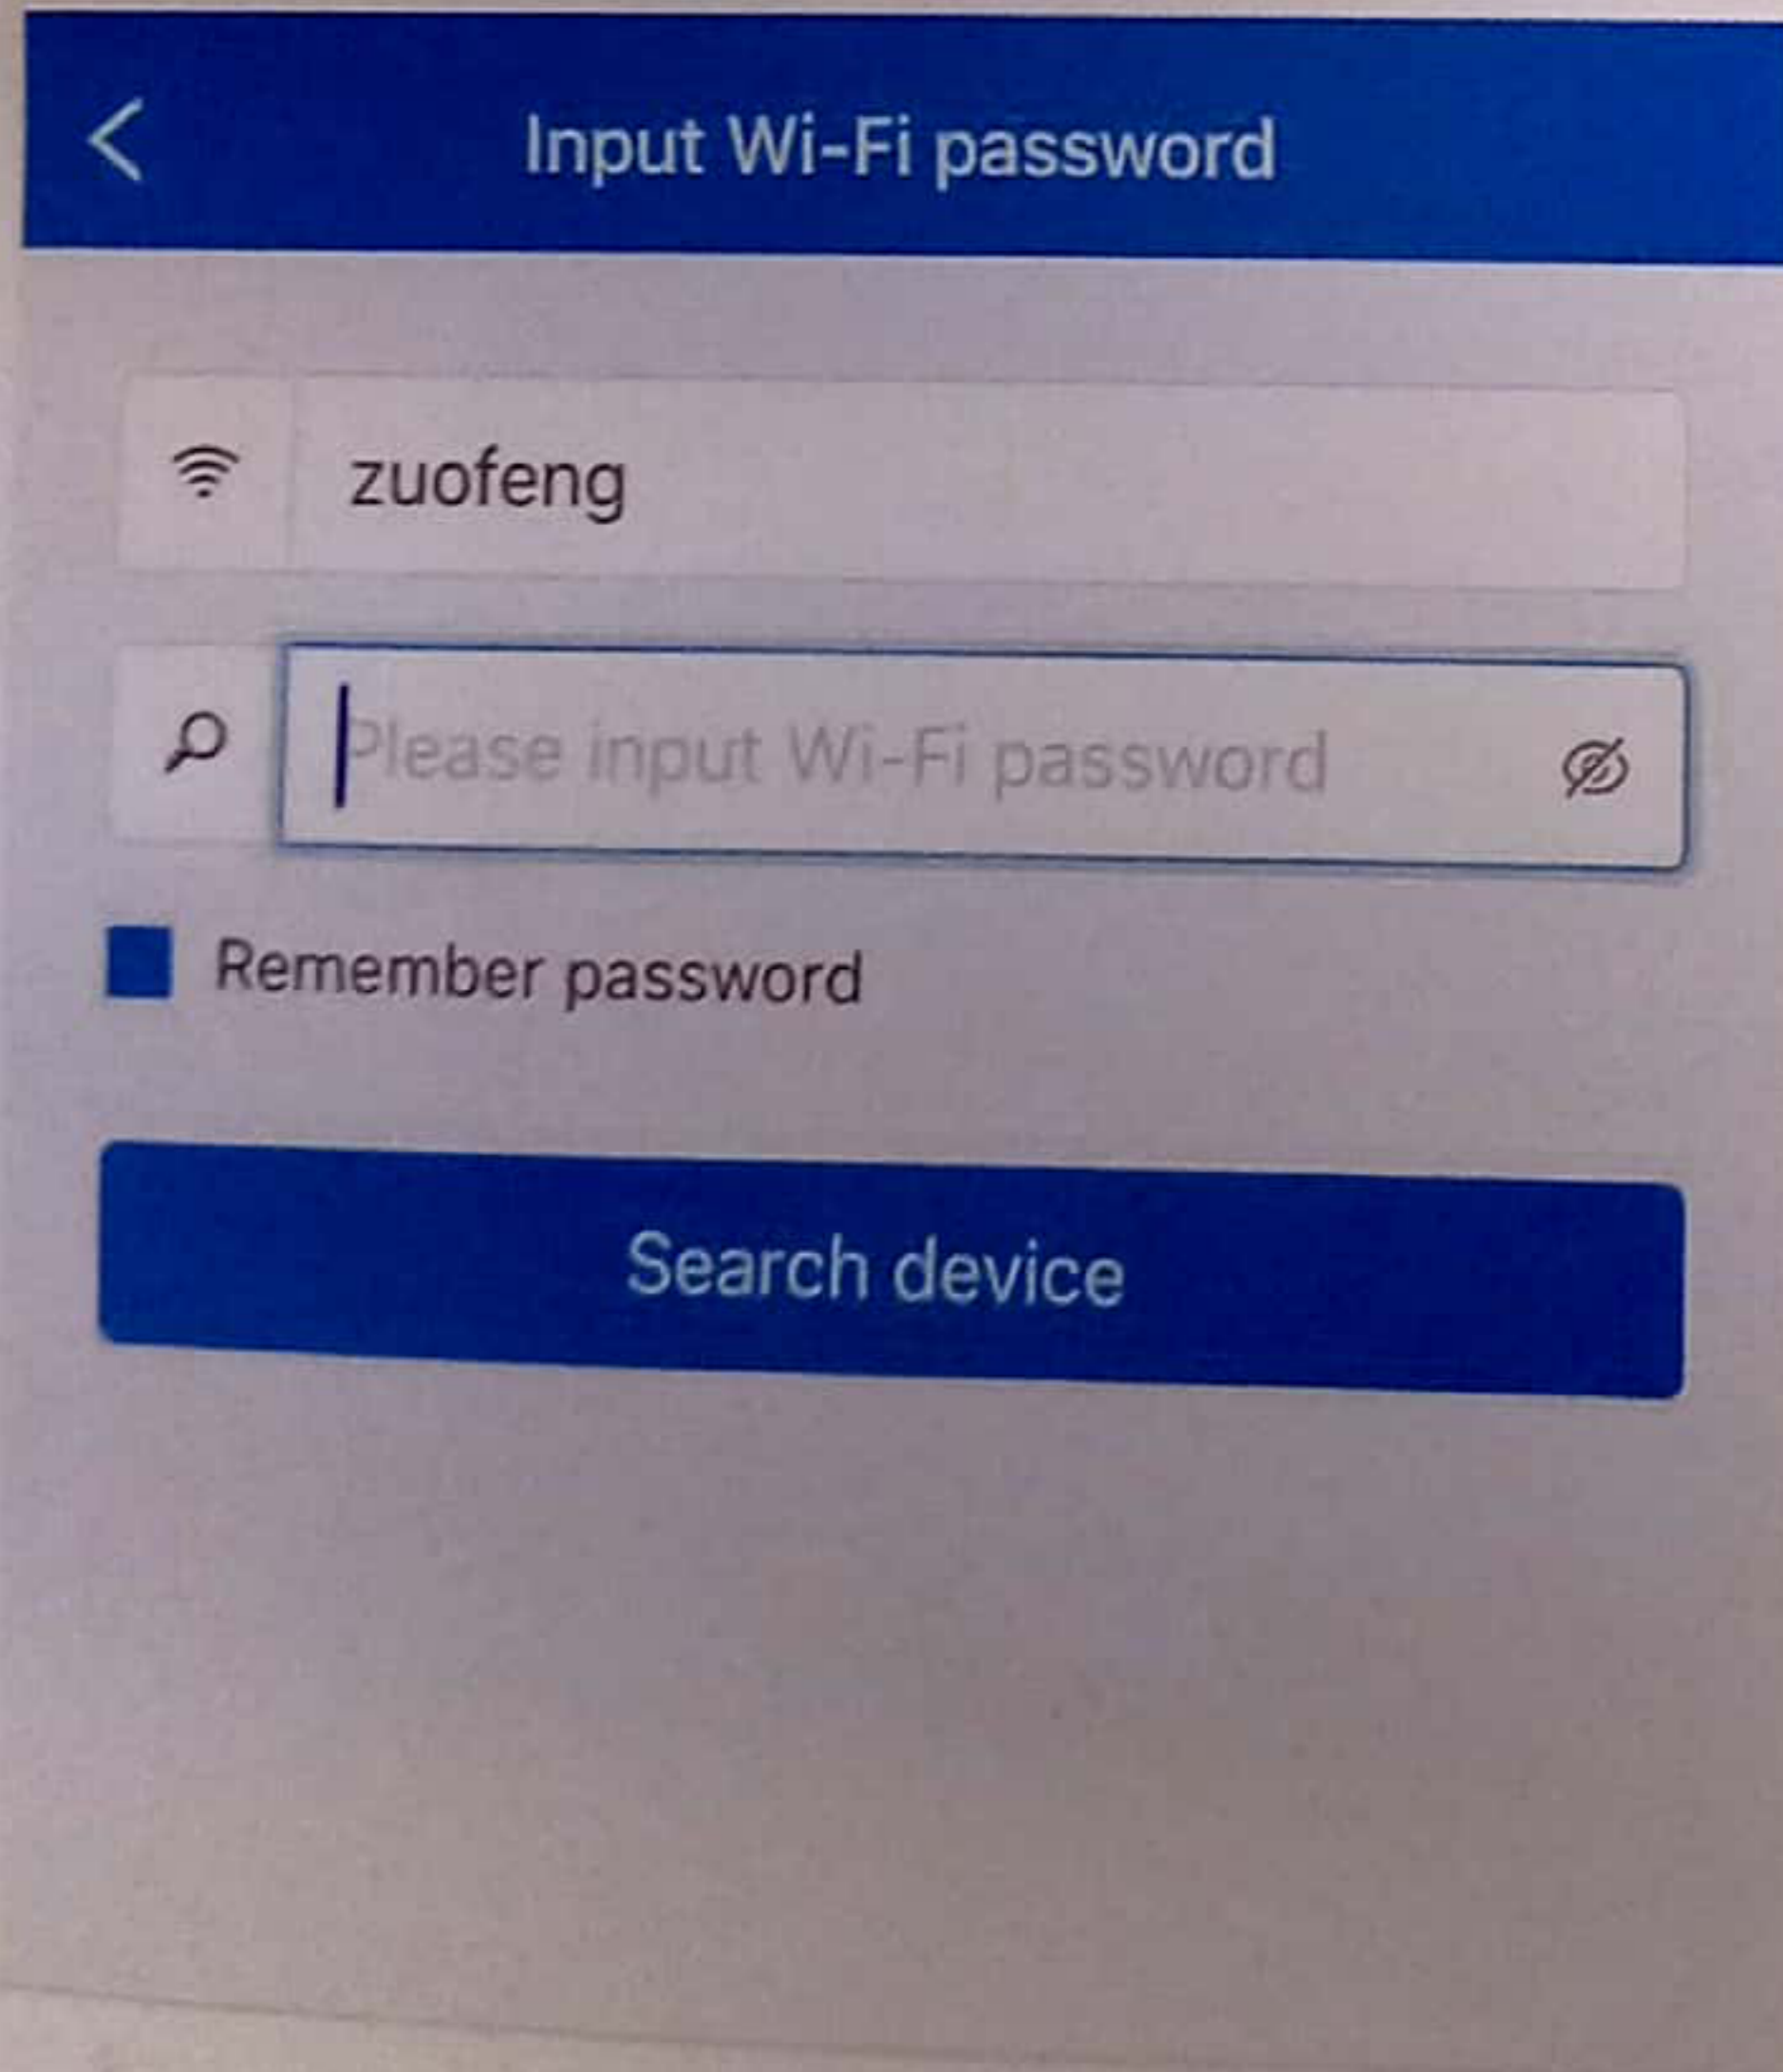




TUYA Smart APP CONNECTING TUTORIAL

APP Remote Unlock

1. Download "TUYA" from App store(ios)/Download "TUYA" from google play(Android)

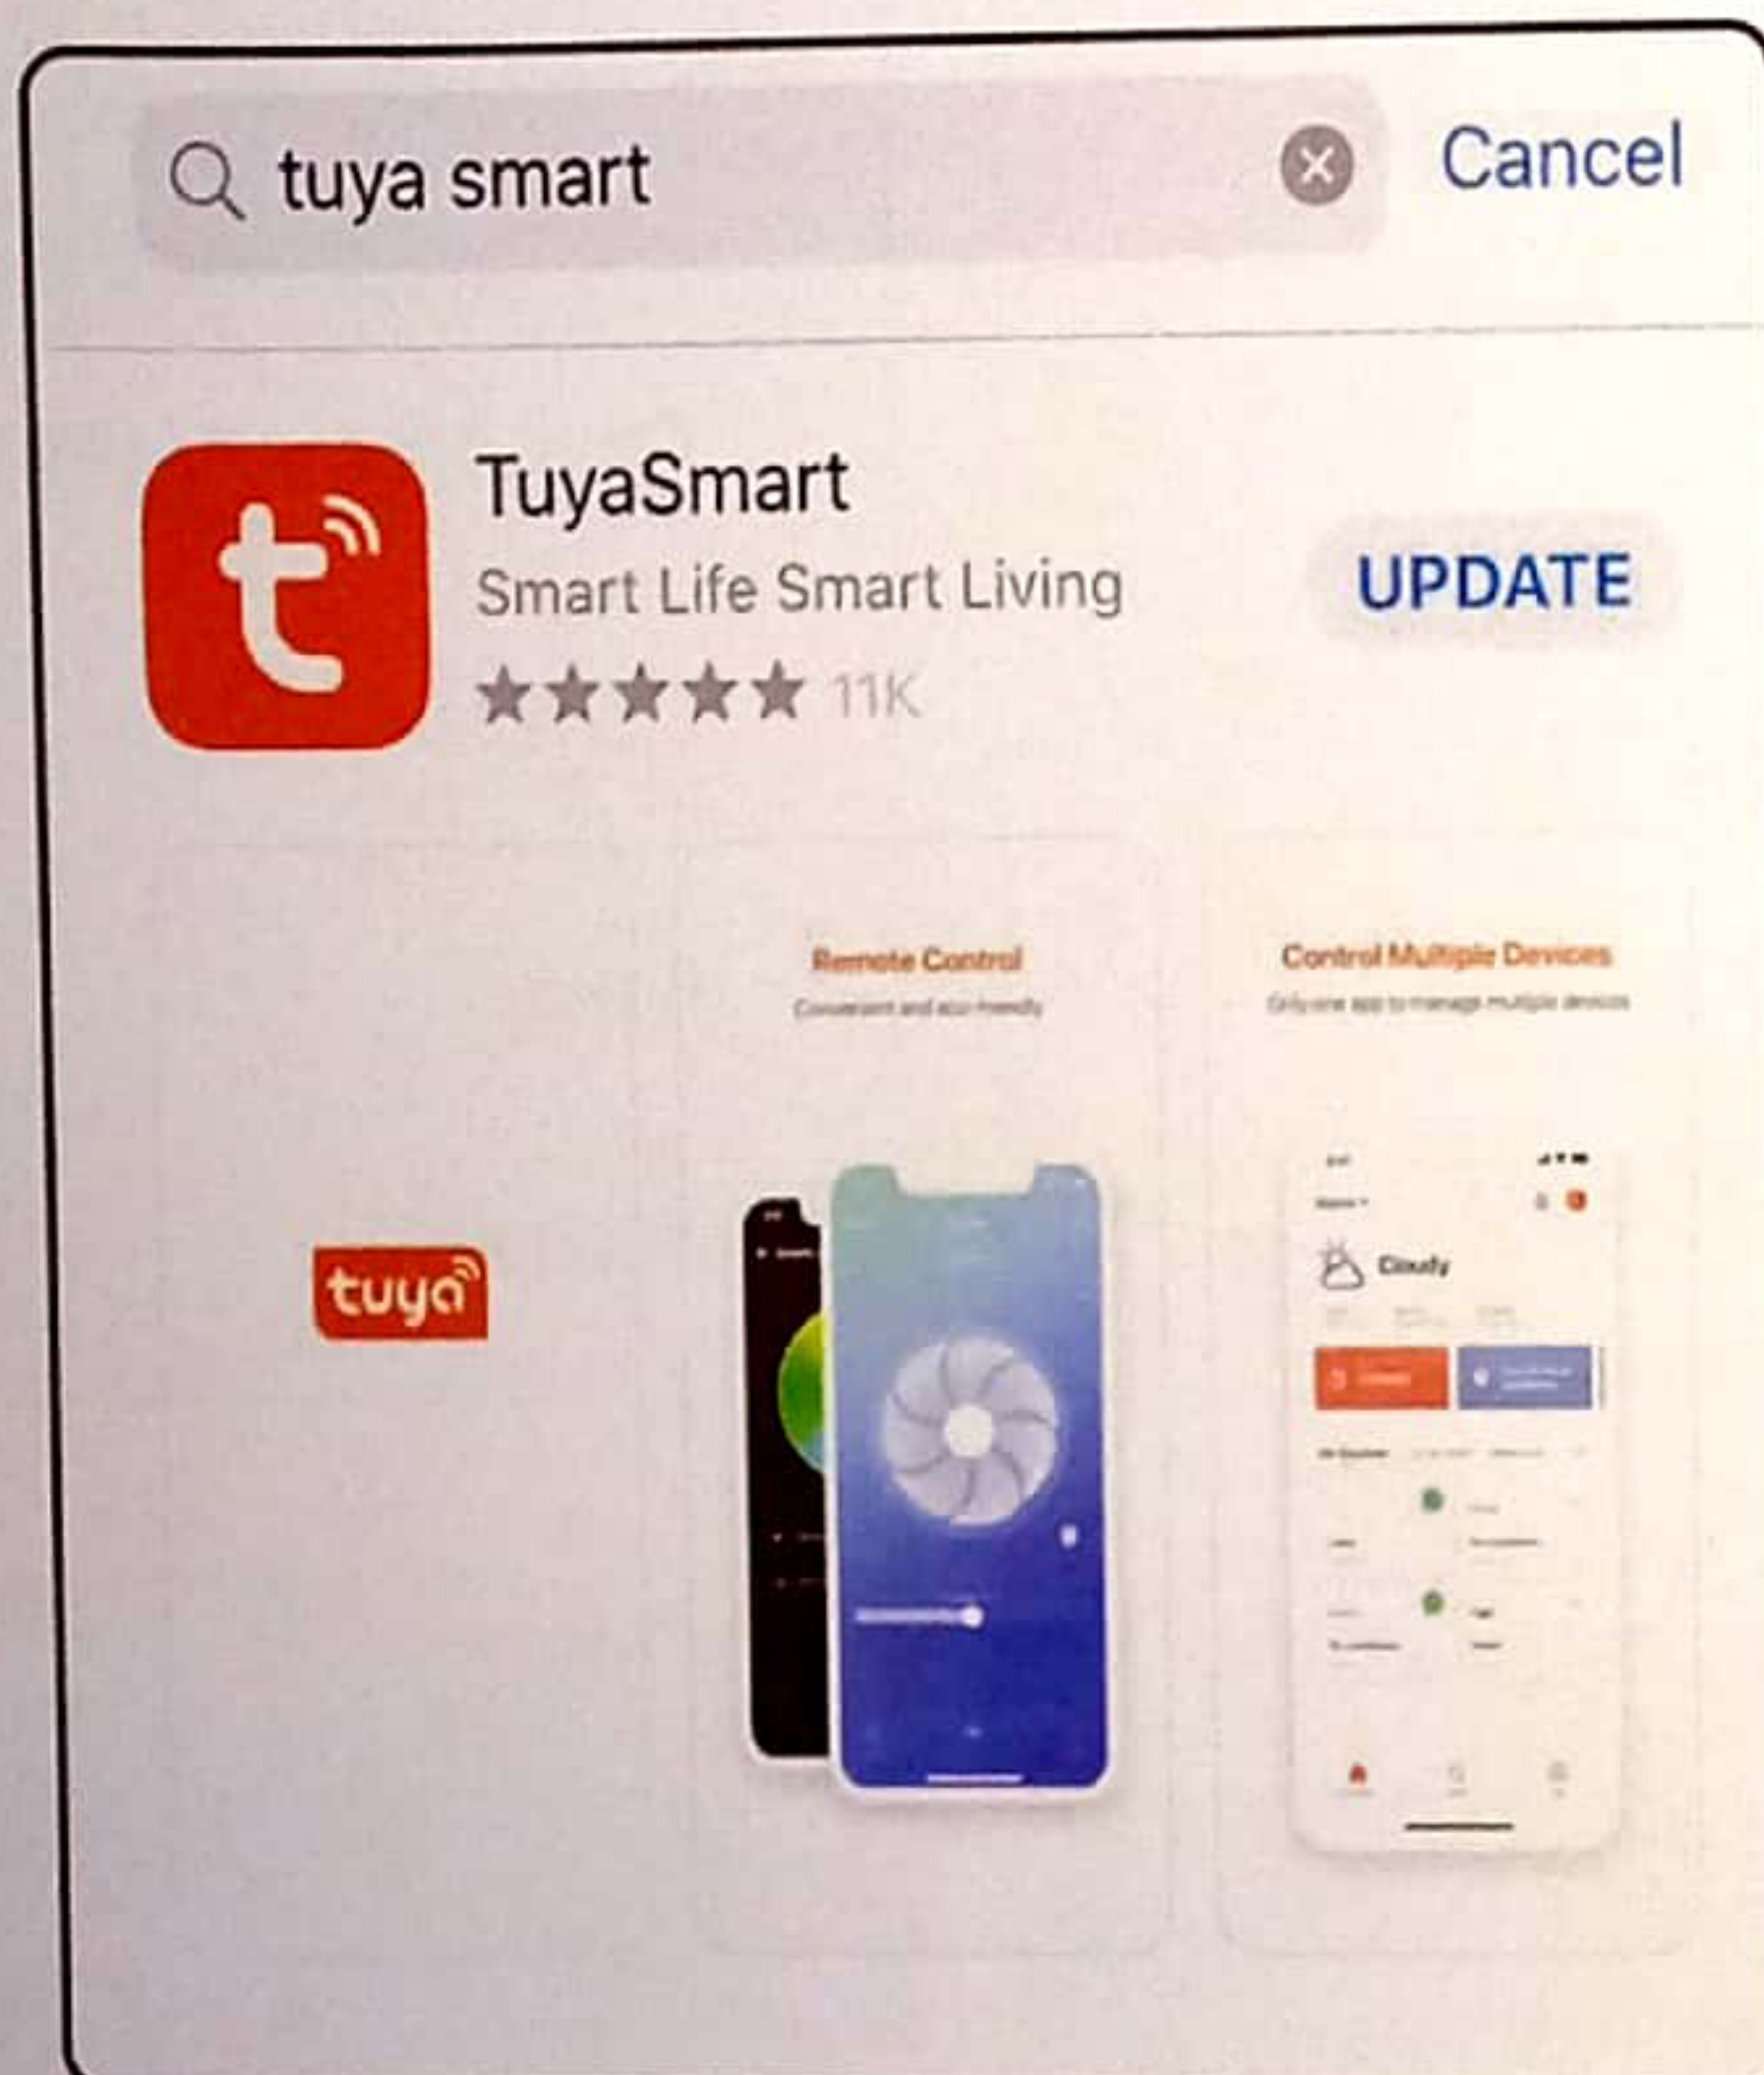

- 2) User registration/login. For the first time, you need to register a user, enter a mobile phone number or email address to register users; If have account,user can login in directly .
- 3) After logging in, click "ADD"---"Add Wi-Fi Device"

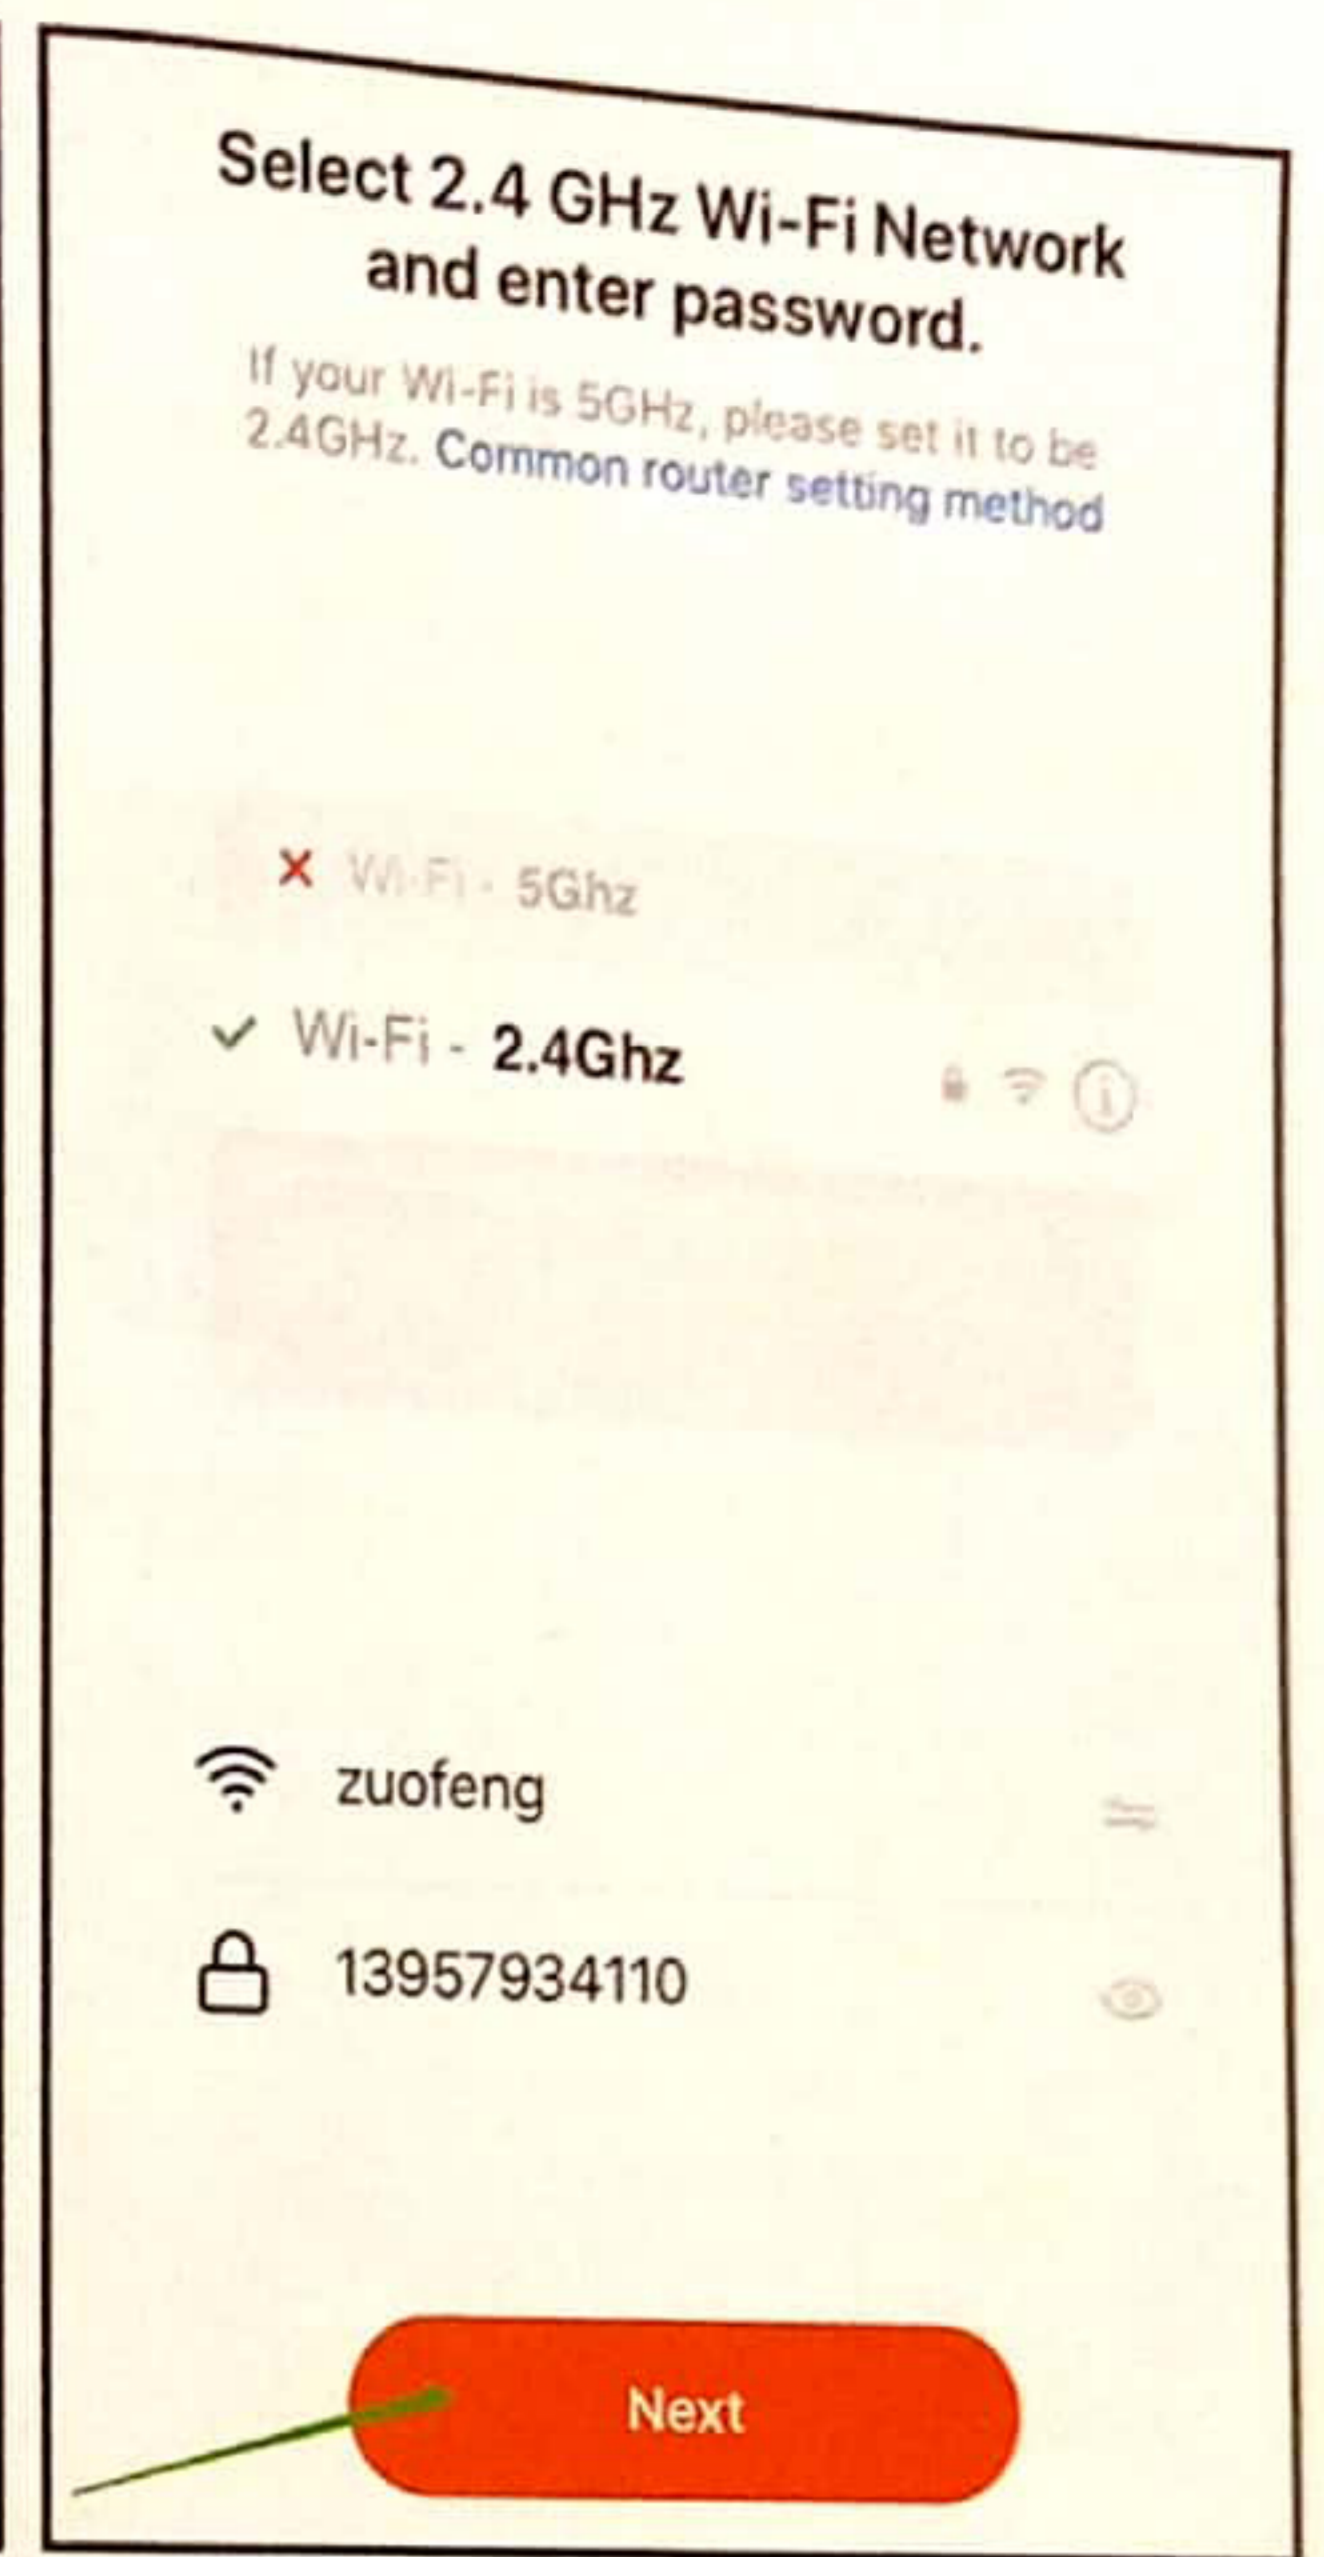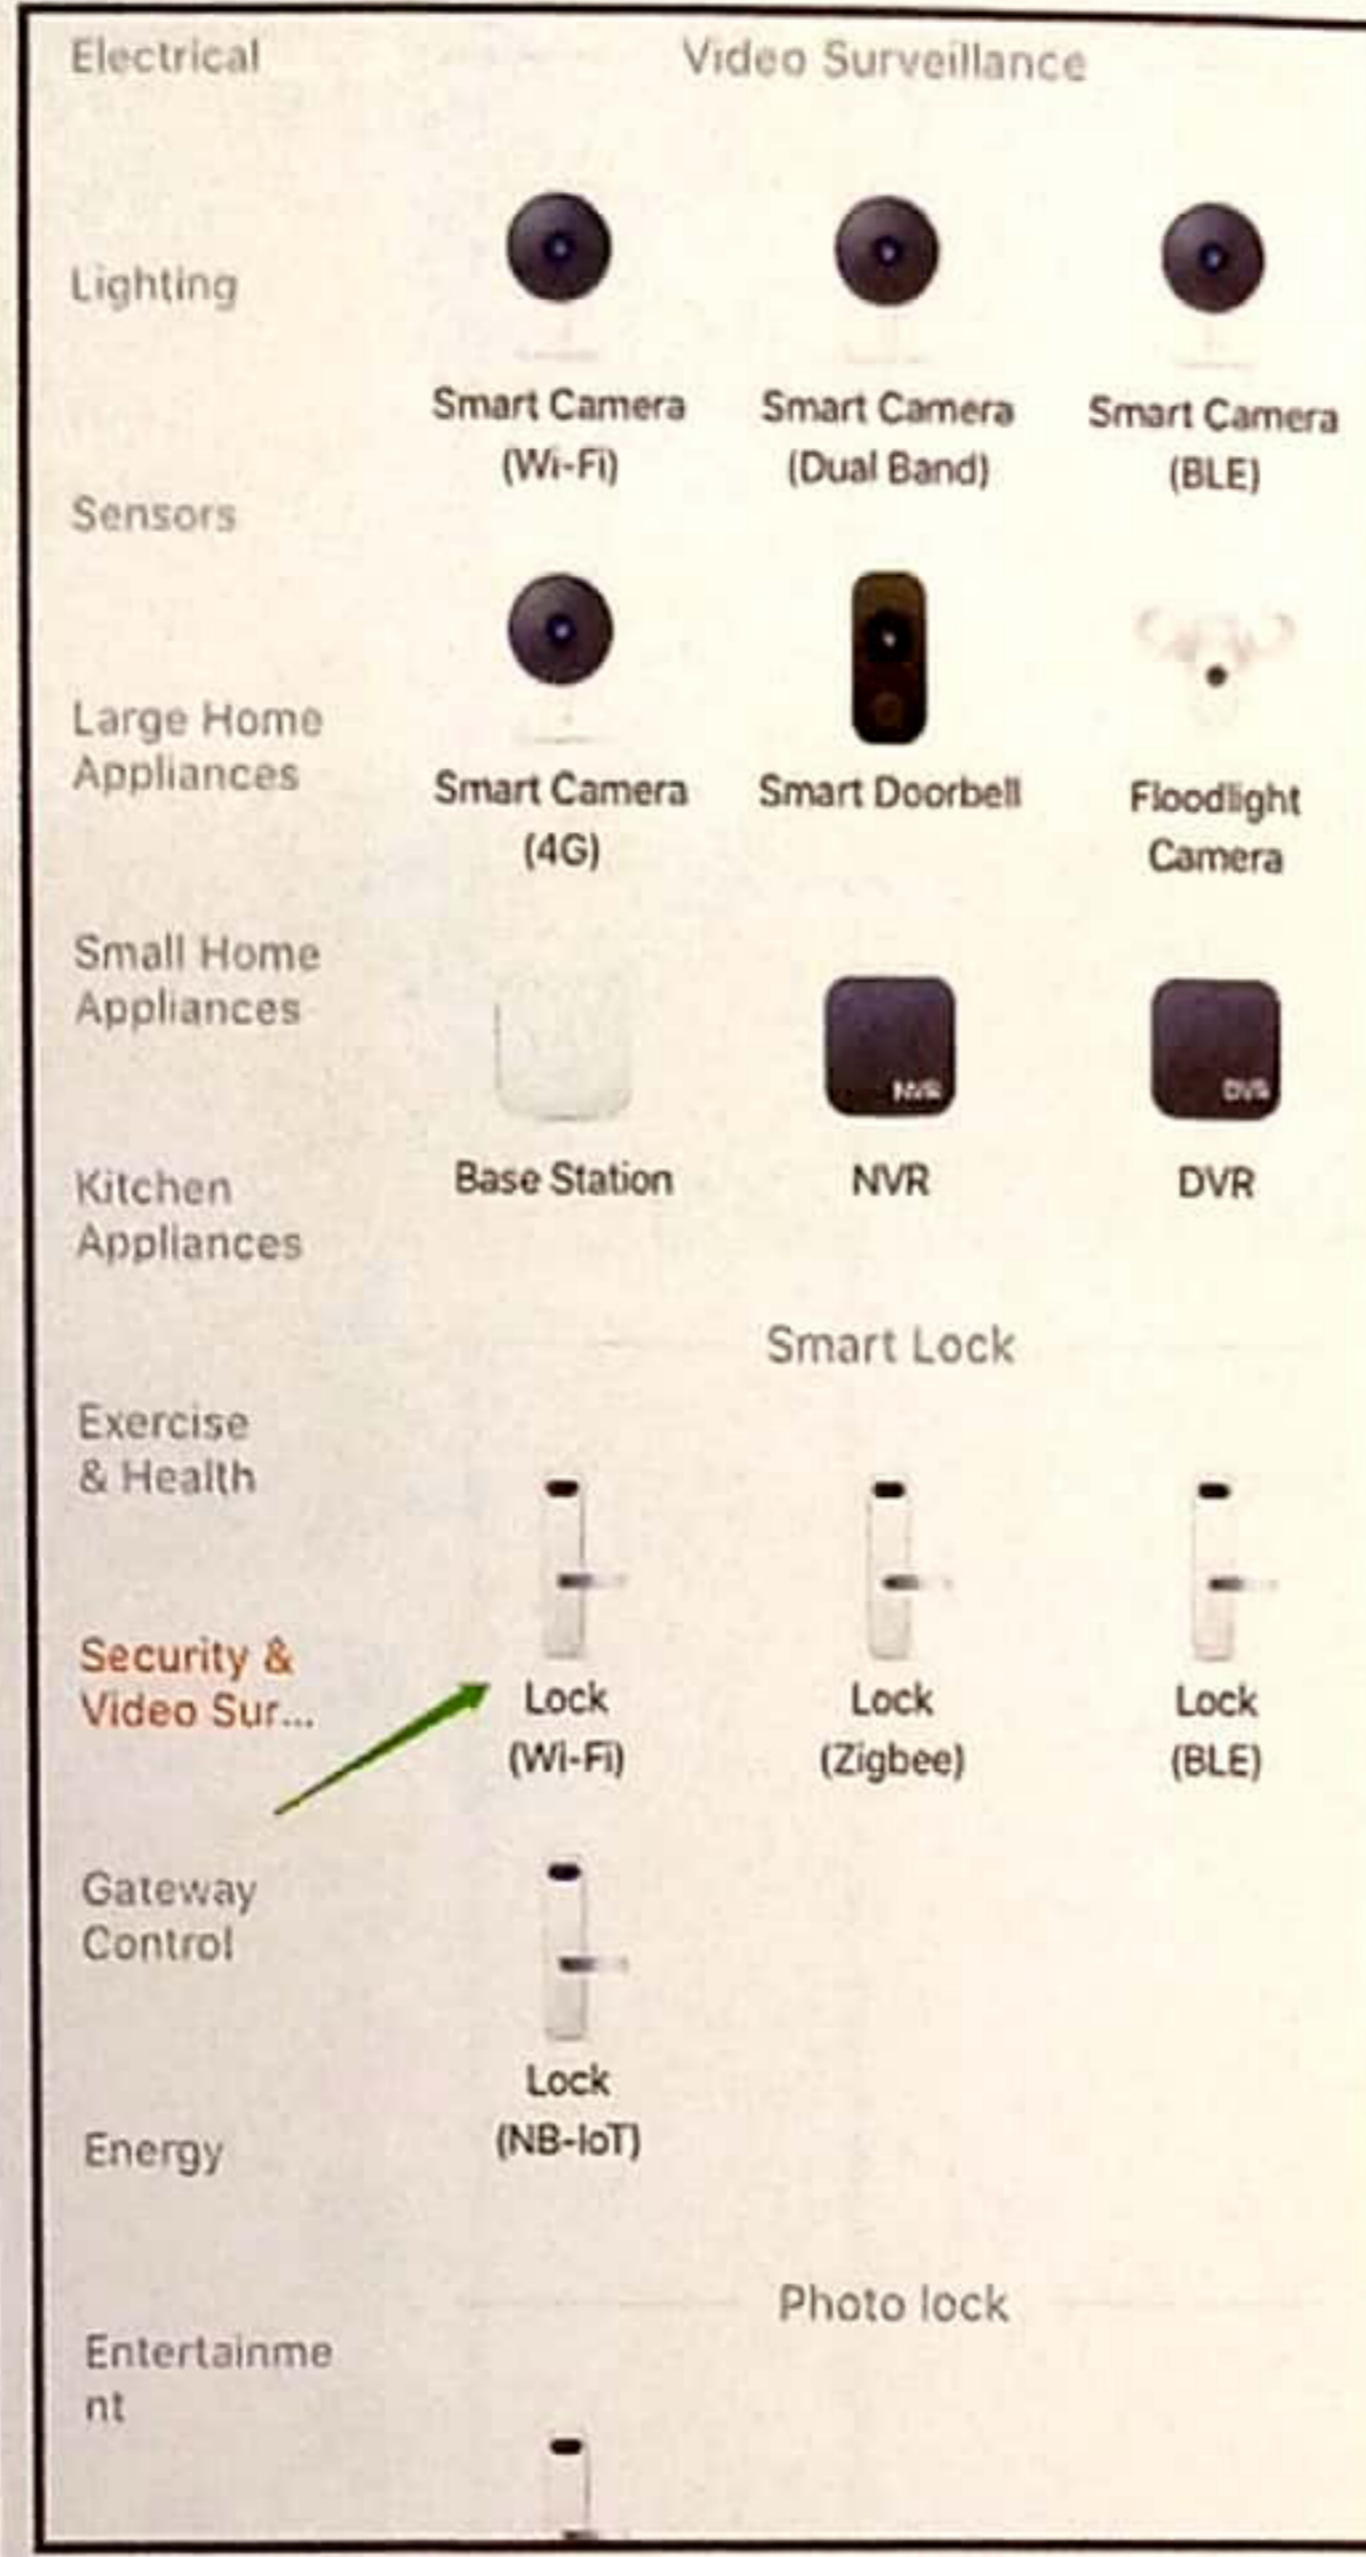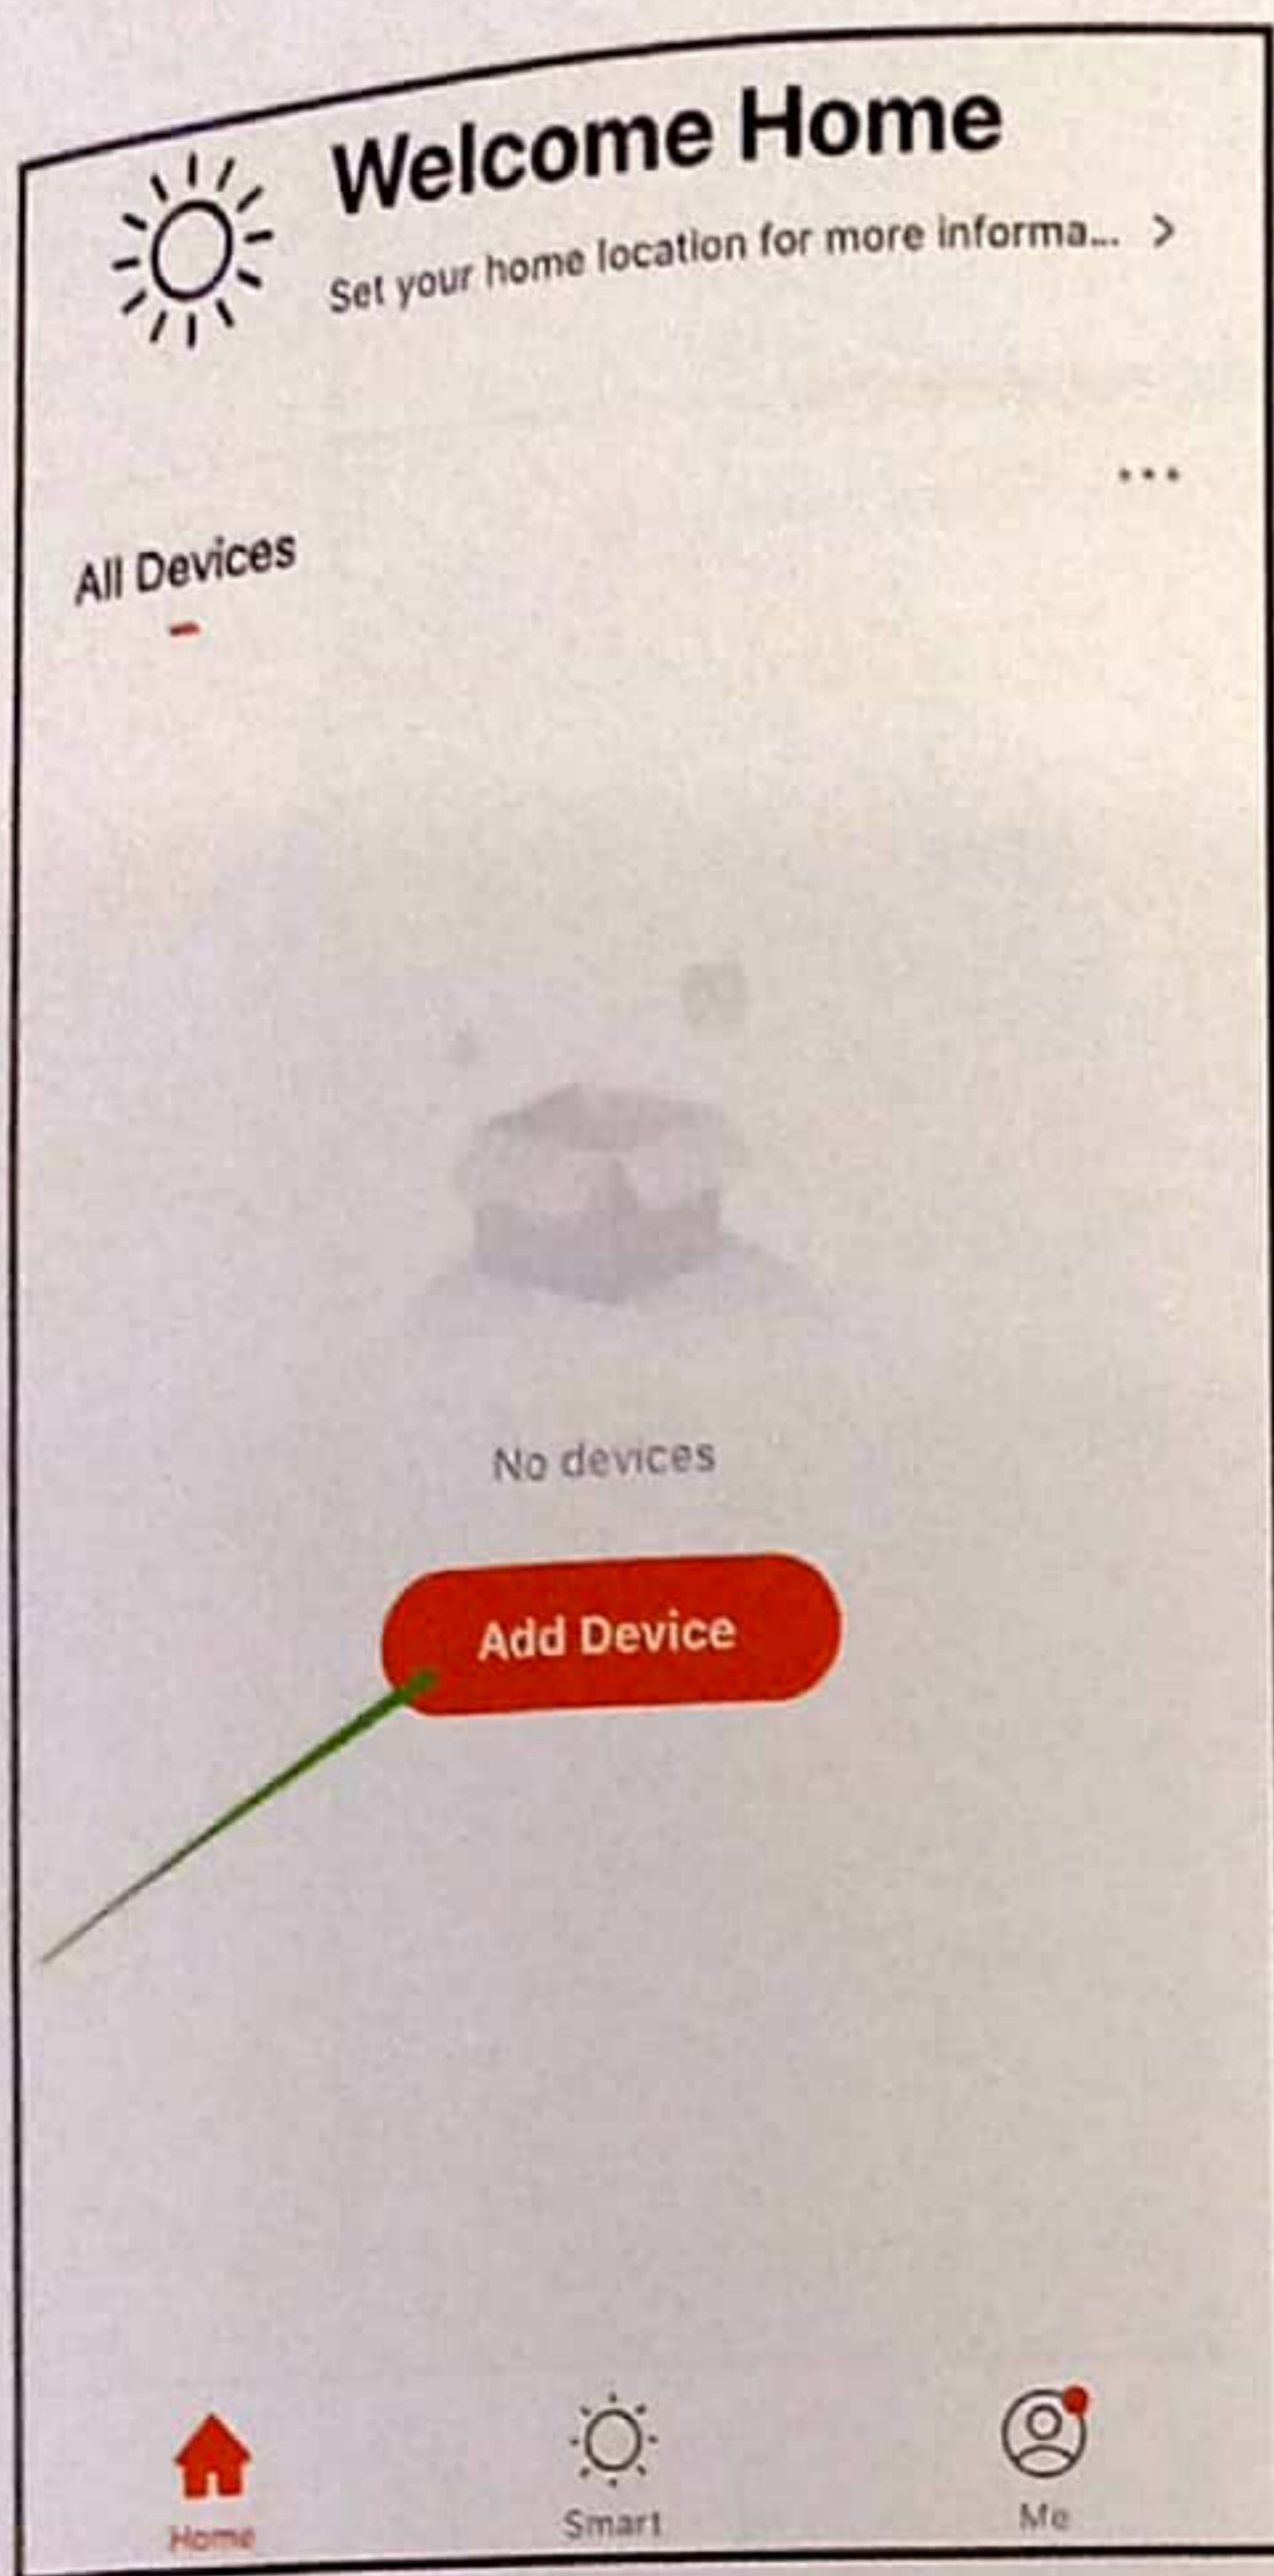

4) Back to the lock Enter "*" and "#" → enter administrator authentication(password/card/fingerprint) → Press 1




Press *# to Wake up screen in initialization state

After adding an administrator, you need to verify the administrator information every time when you need to enter function

Press 1 WiFi setting


Press 2 lock functions setting

5) Back to tuya app, waiting for adding device.....

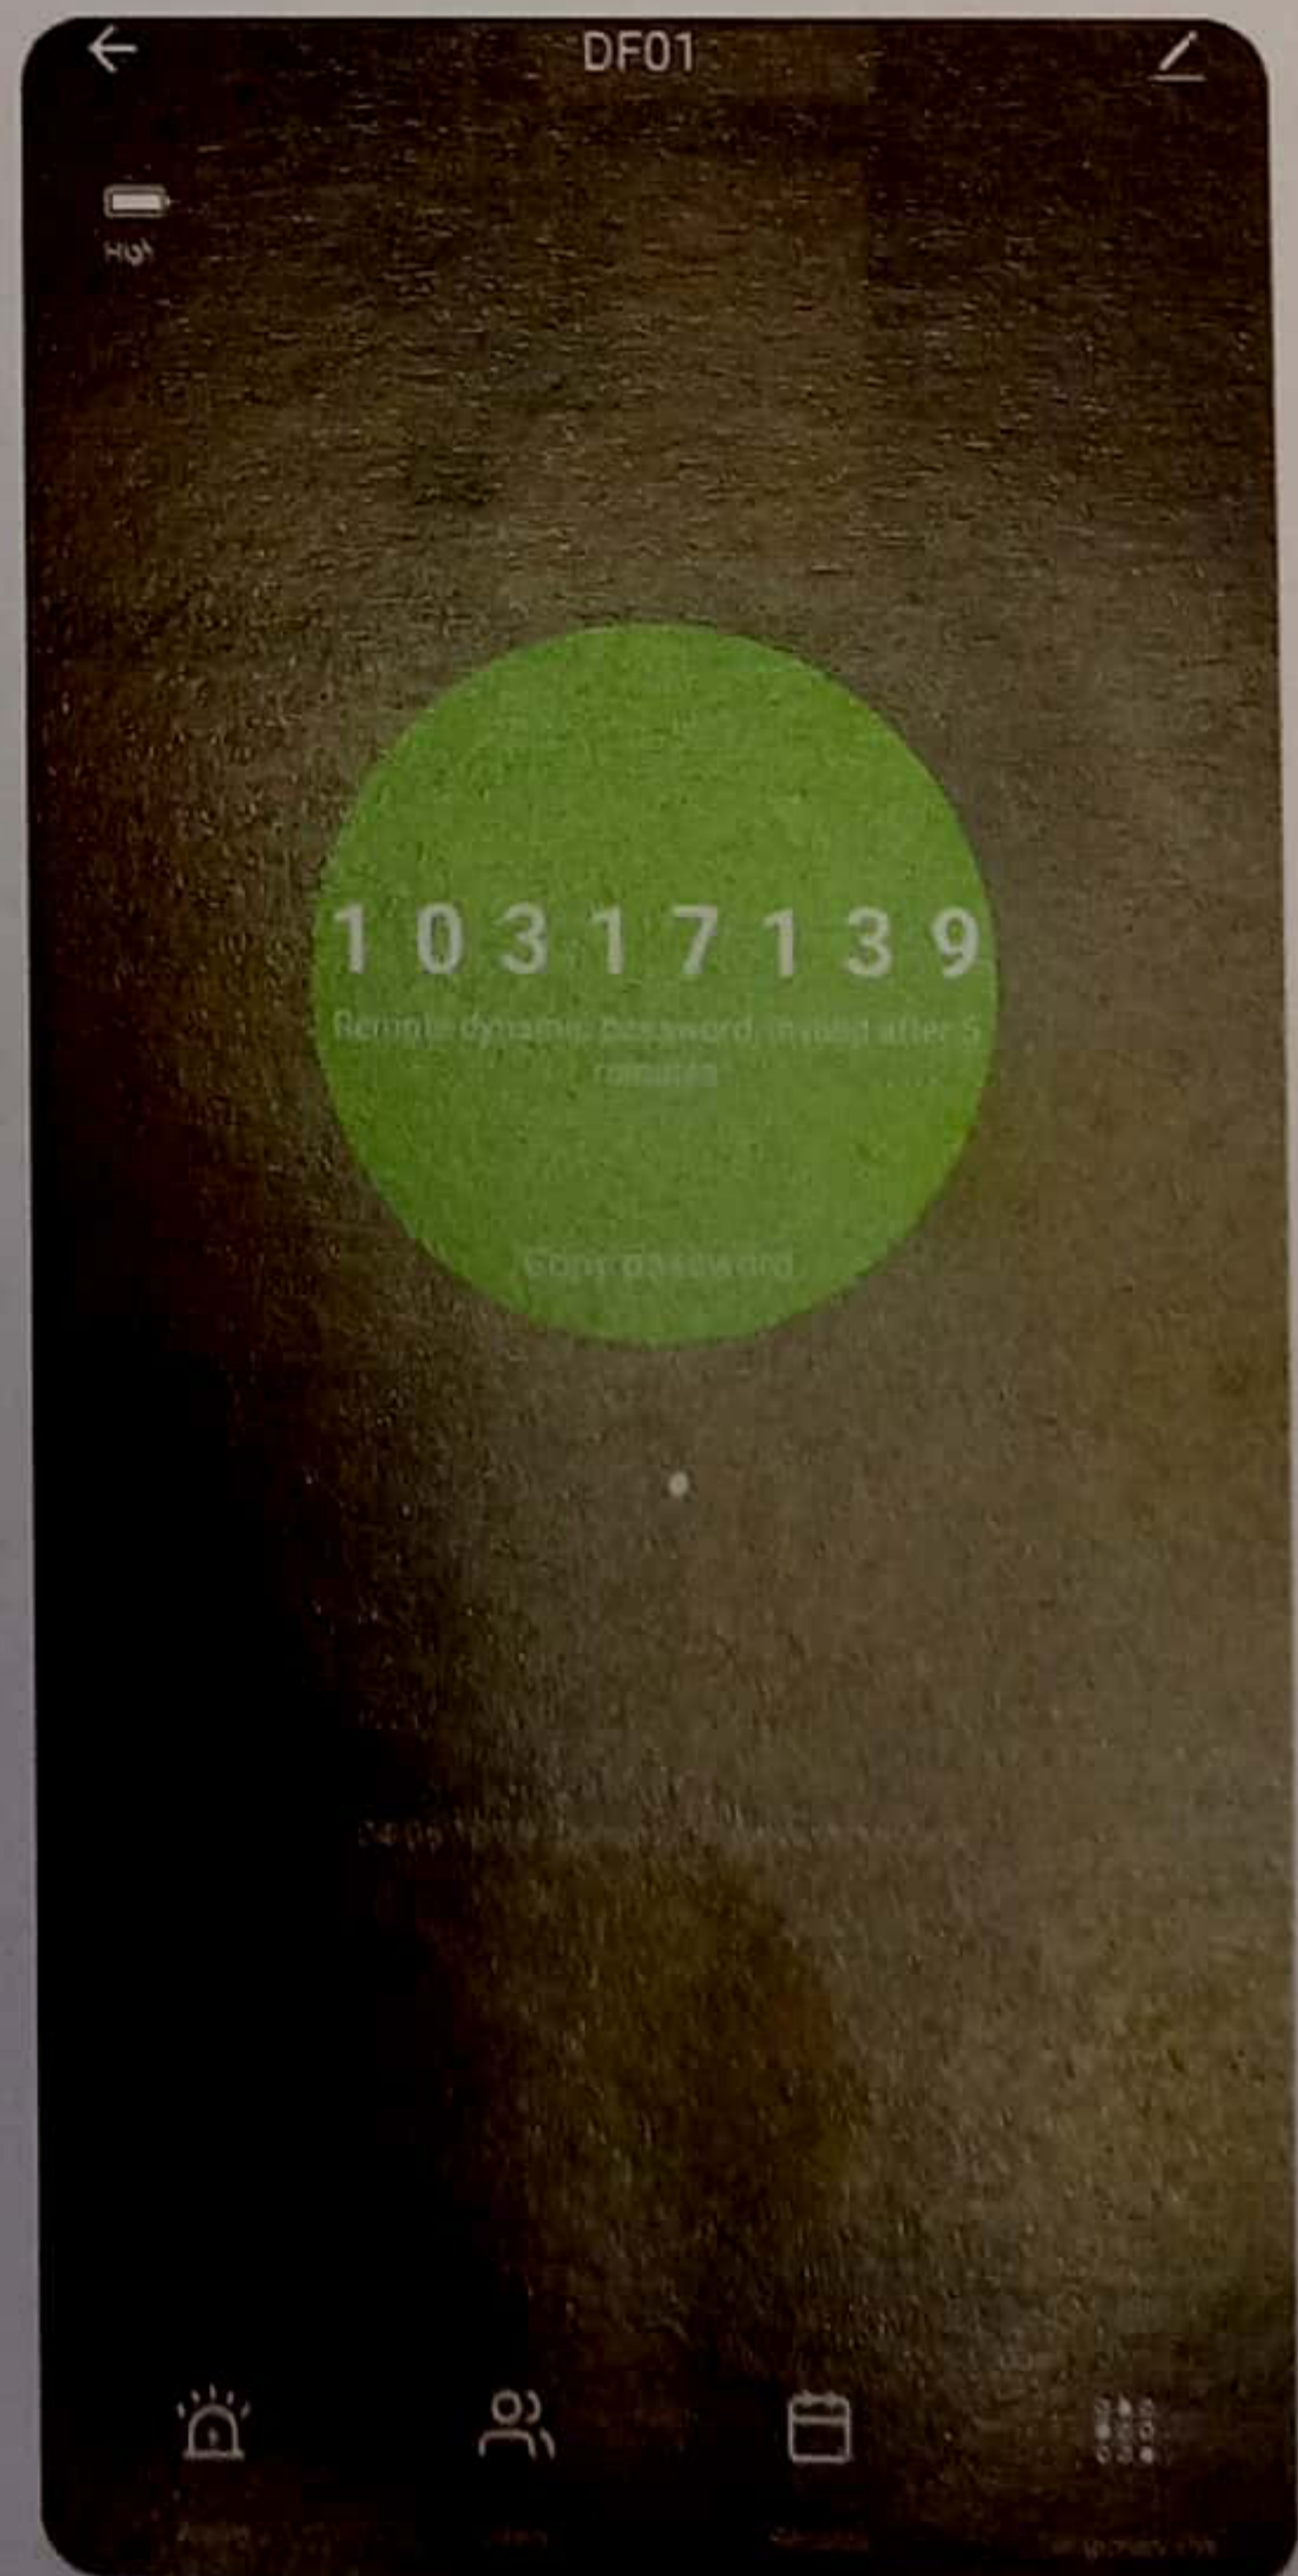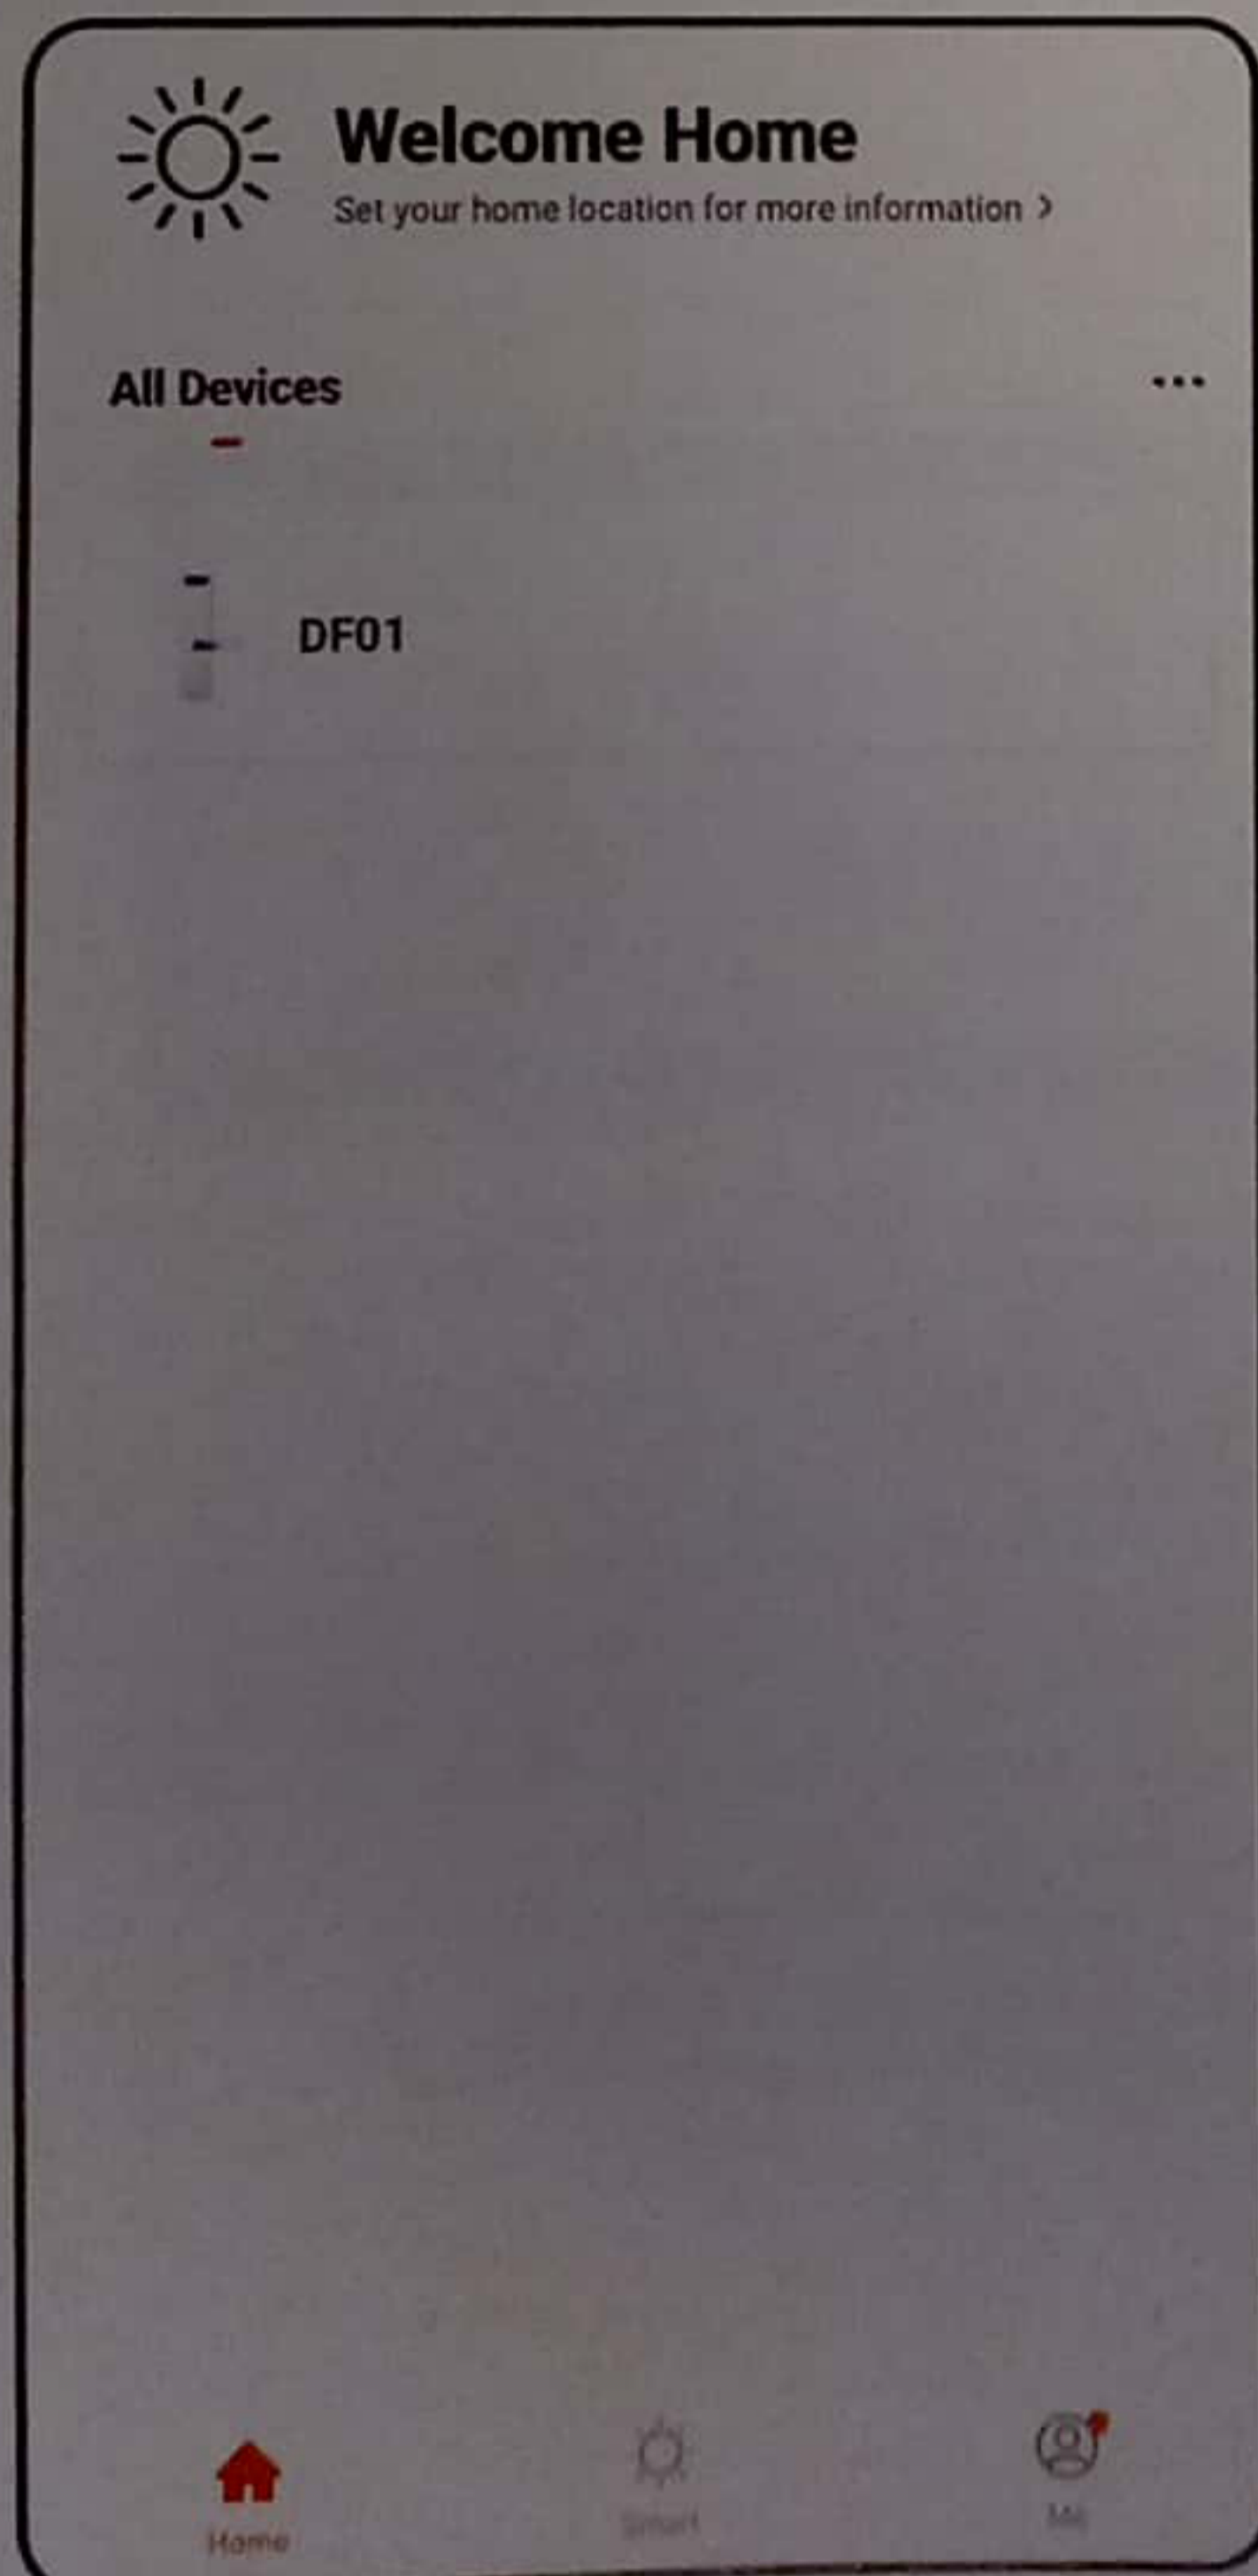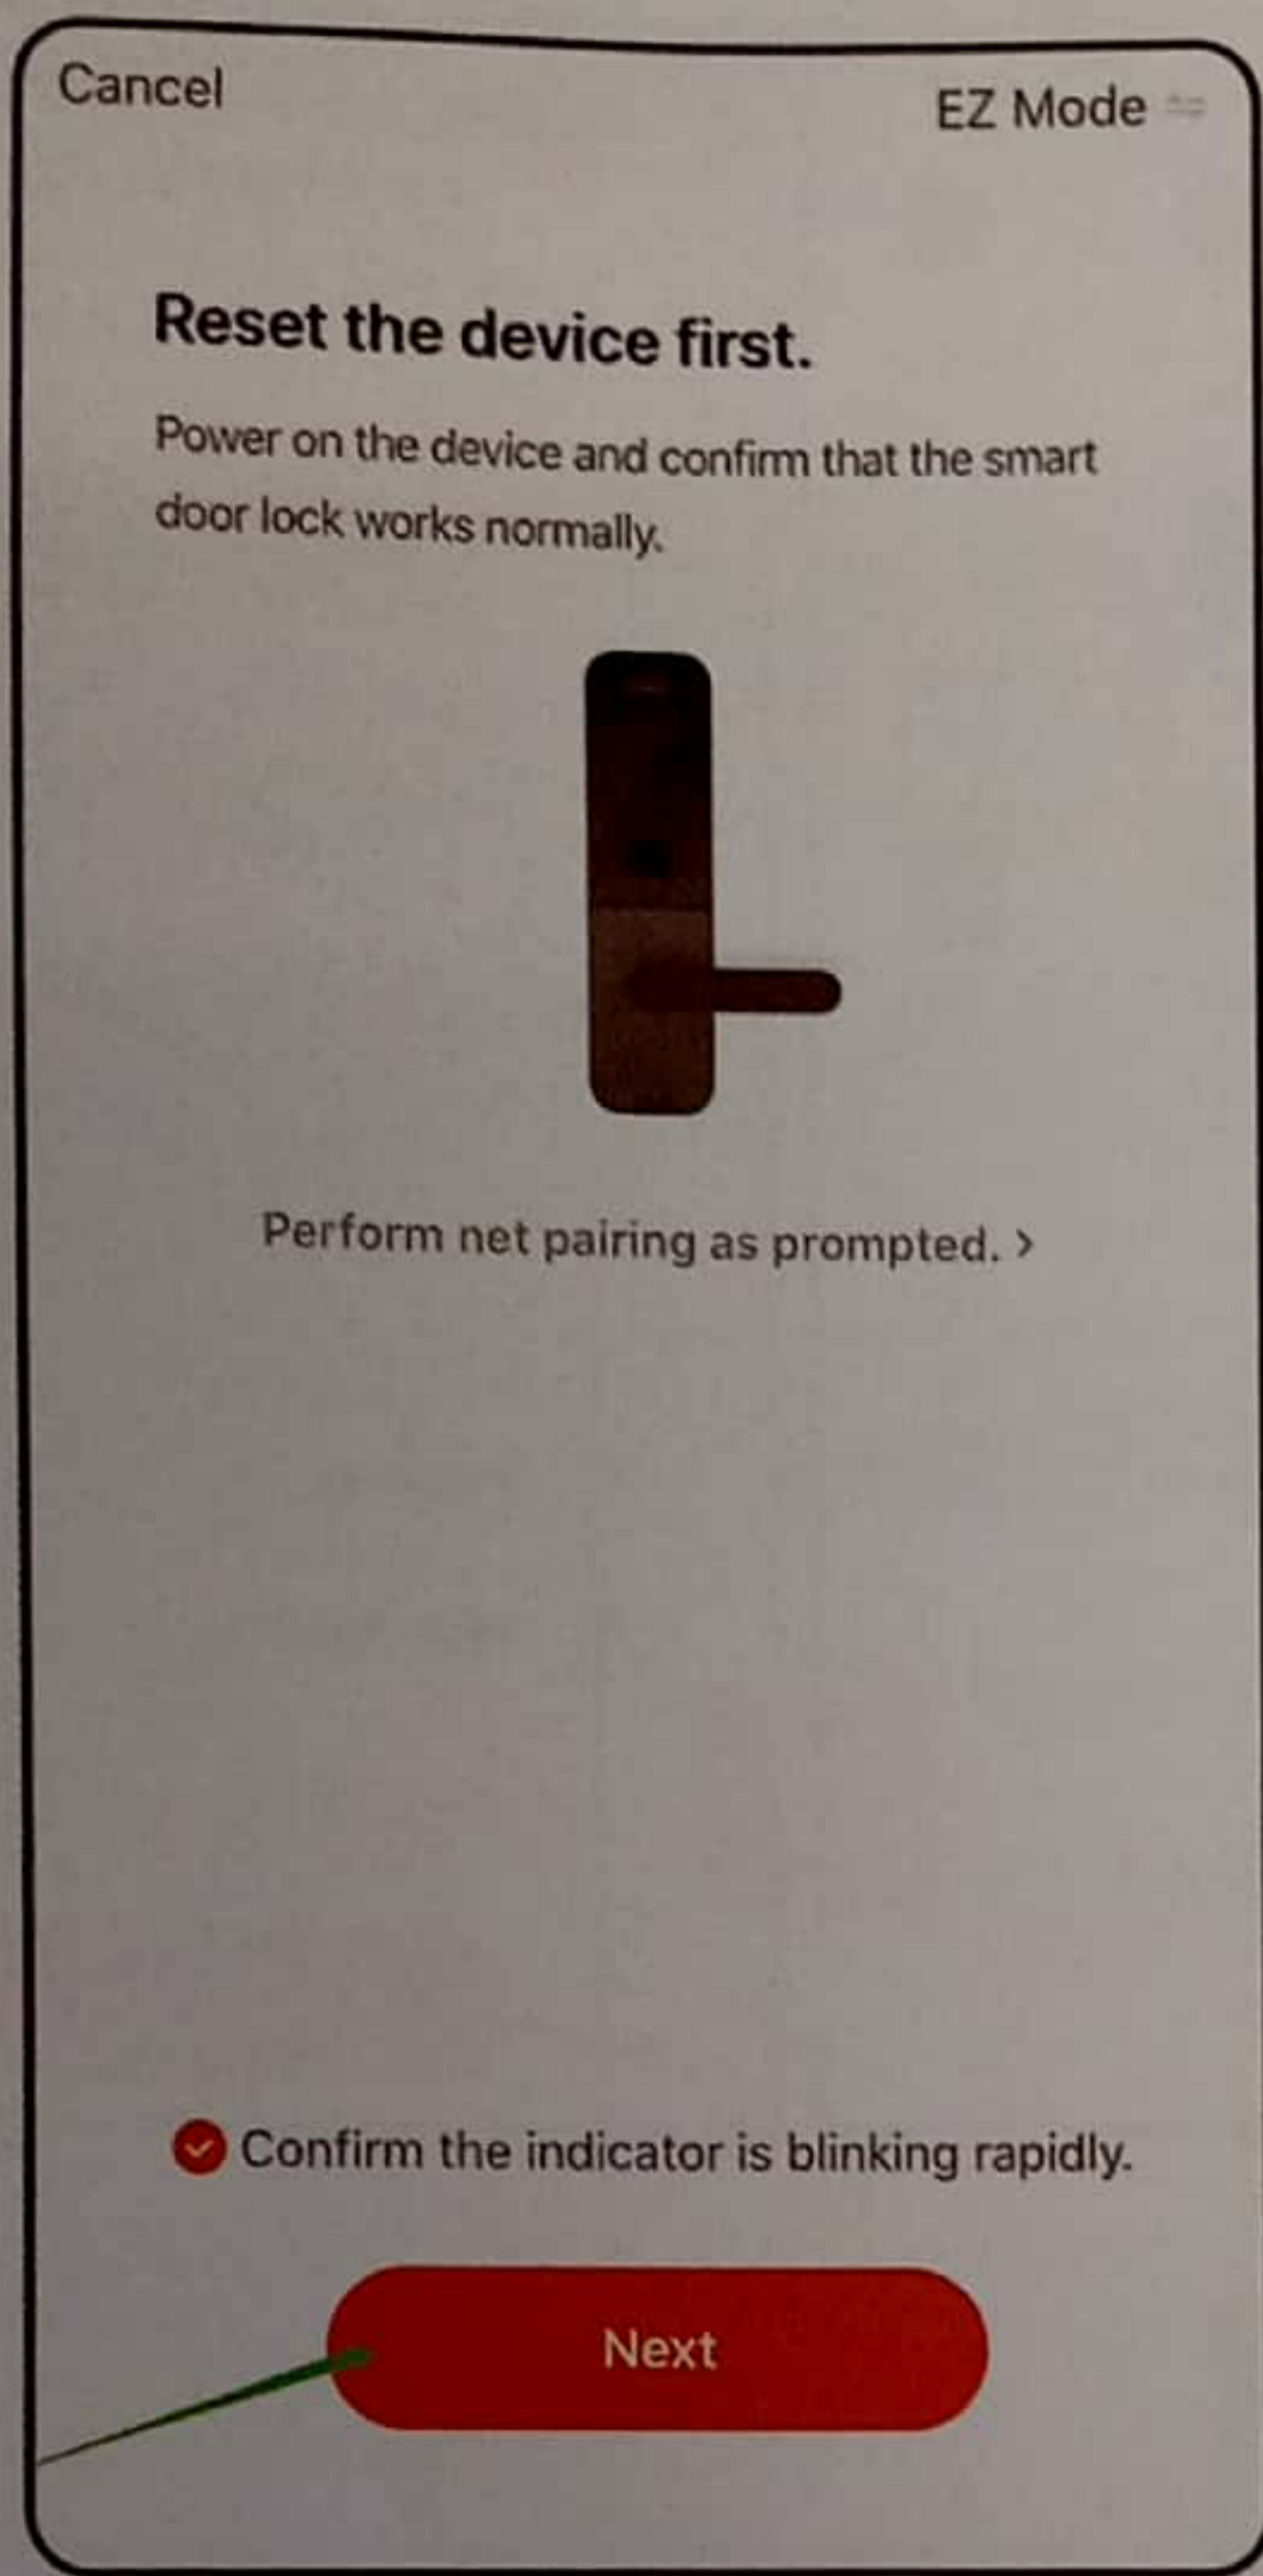



SUPPORTED APP: USmart Go

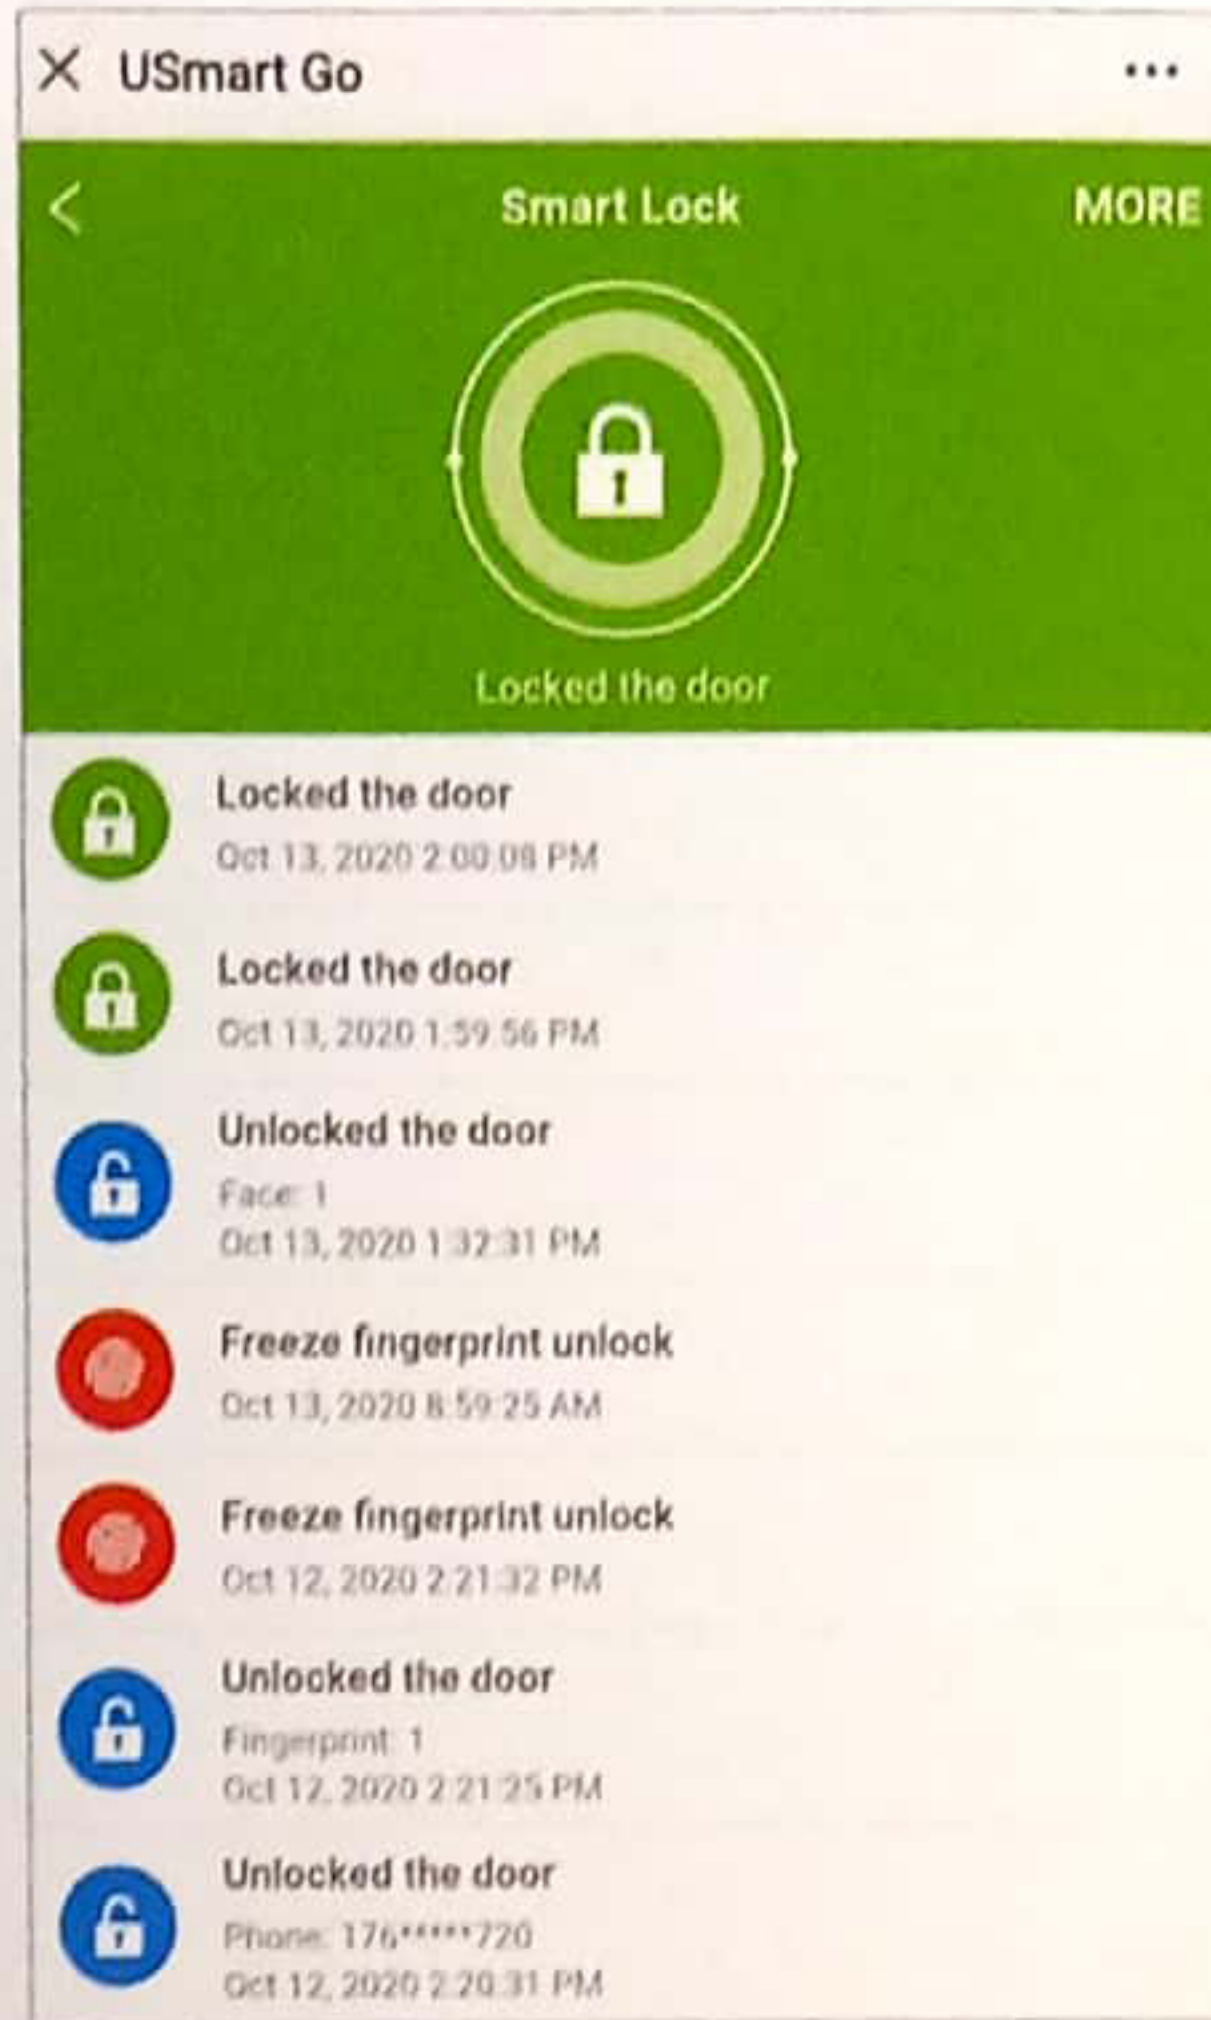

SUPPORTED APP: tuya APP

